Cold Gas RCS for the NEA Scout CubeSat

AIAA YP Symposium 2017



Brandon Stiltner[1] Andrew Heaton[2]
Chris Becker[2] Ben Diedrich[1]
Juan Orphee[2] Ivan Bertaska[2]

[1]Jacobs ESSSA Group / NASA MSFC
[2]NASA MSFC

Near Earth Asteroid (NEA) Scout Overview

The Near Earth Asteroid Scout will

- Image/characterize a NEA during a slow flyby
- Demonstrate a low cost asteroid reconnaissance capability

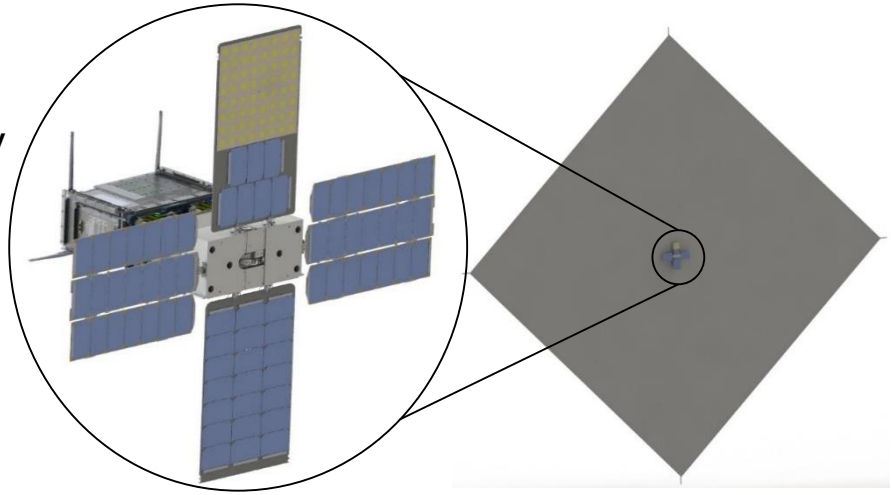

Key Spacecraft & Mission Parameters

- 6U cubesat
- ~86 m^2 solar sail propulsion system
- Manifested for launch on the Space Launch System (EM-1/2019)
- Up to 2.5 year mission duration

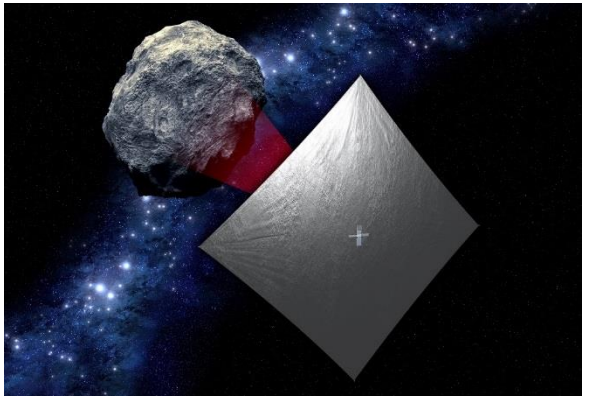

Target Reconnaissance with medium field imaging
Shape, spin, and local environment



Close Proximity Imaging
Local scale morphology, terrain properties, landing site survey

NEA Scout's Mechanical Configuration

NEA Scout is split into three major parts:

1. Avionics
2. Solar Sail and Deployer
3. RCS

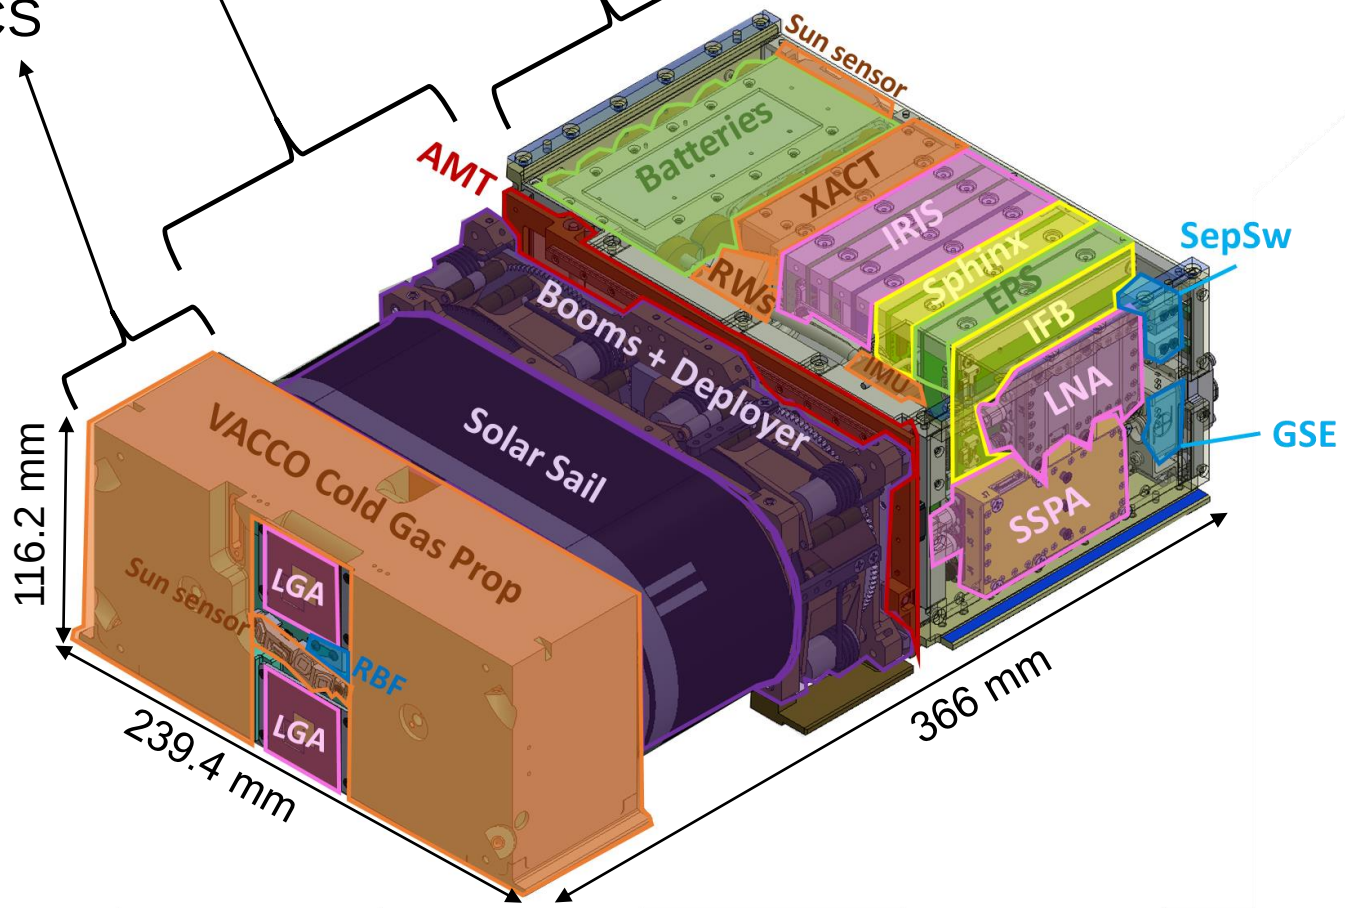

NEA Scout's Solar Sail

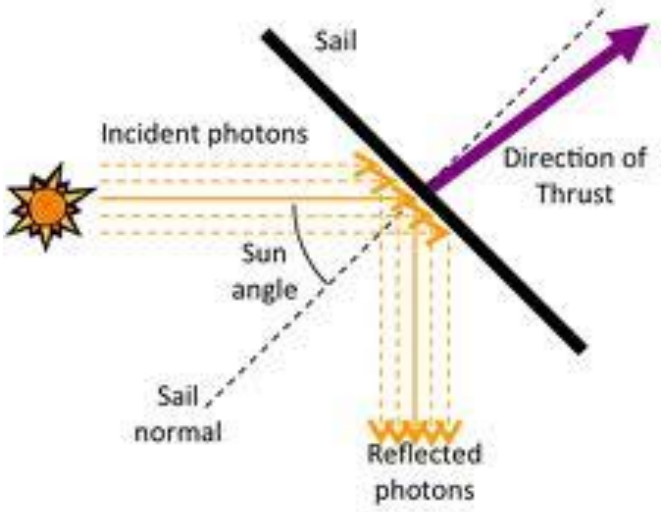

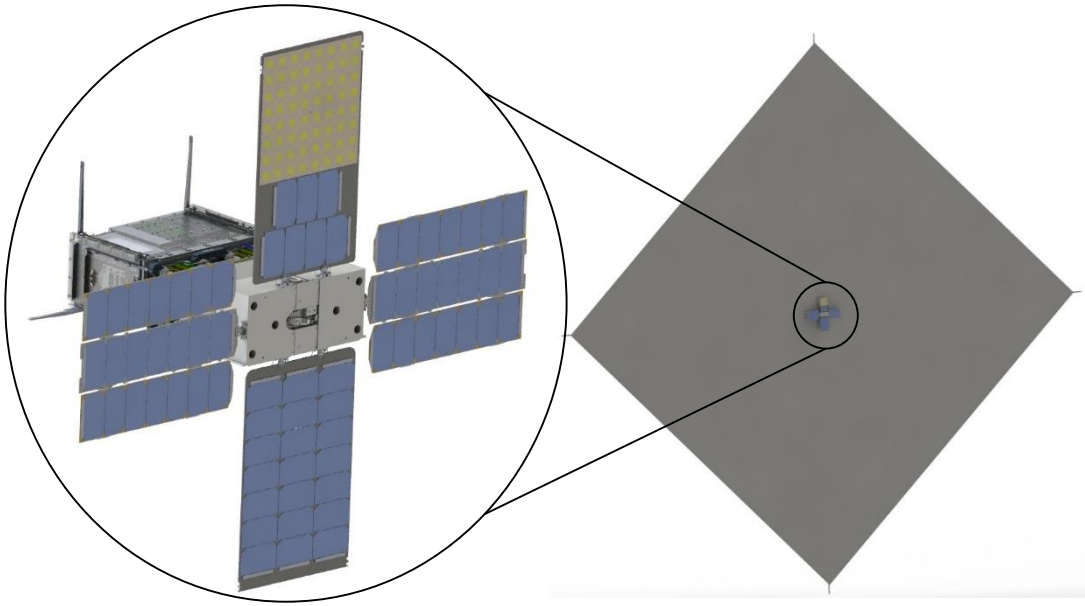

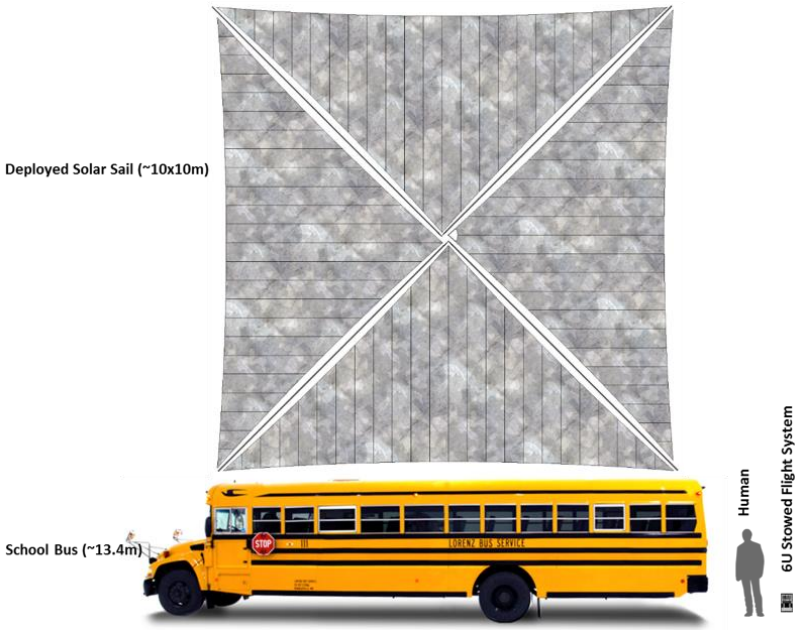

Light reflects off of the Solar Sail, providing a small but continuous amount of thrust.

'Fuel' never runs out.

NEAS Control System Overview

Science Camera

Star Tracker/ Drive Control Electronics* (BCT)



Sun Sensors* (BCT)

IMU (Sensonor)



Active Mass Translator



4X RWA 15 mNms (BCT)

Solar Sail Subassembly

Cold gas RCS

NEA Scout's Active Mass Translator (AMT)

The AMT allows NEA Scout's two *halves* to move relative to each other.

The AMT shifts the CM to trim the solar sail torque.

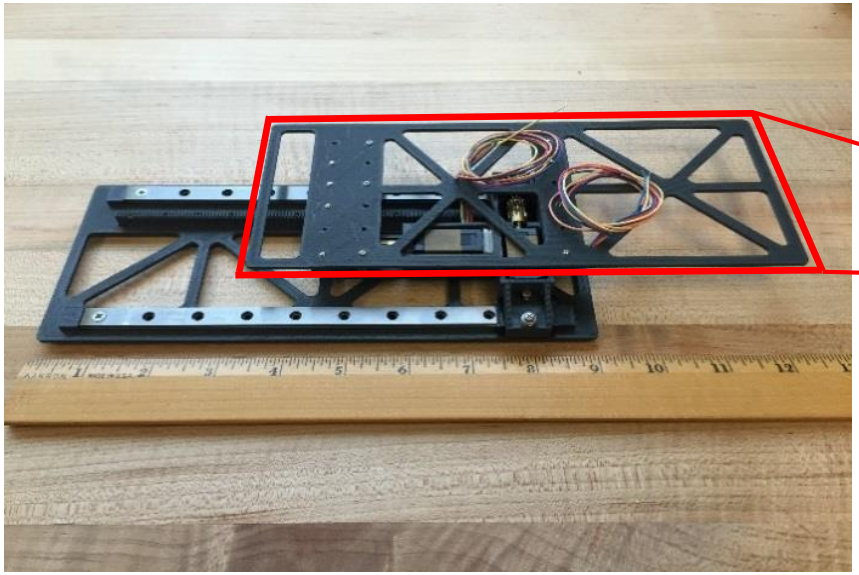

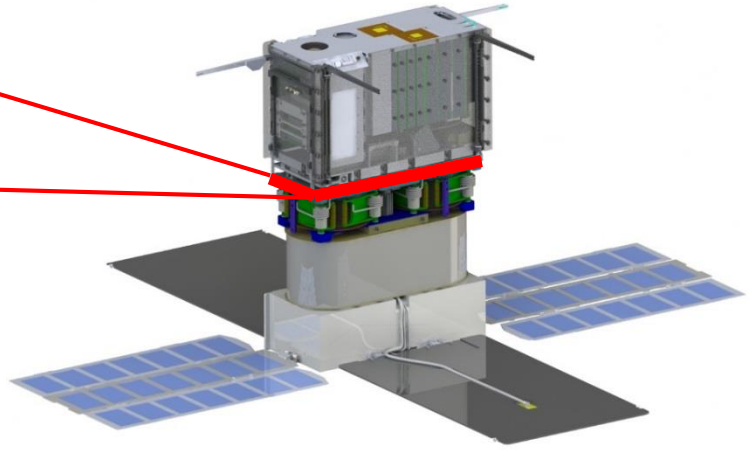

NEA Scout's Active Mass Translator (AMT)

The AMT shifts the CM relative to the solar sail's Center of Pressure (CP).

The solar torque can be trimmed or reversed (allowing for reaction wheel desaturation).

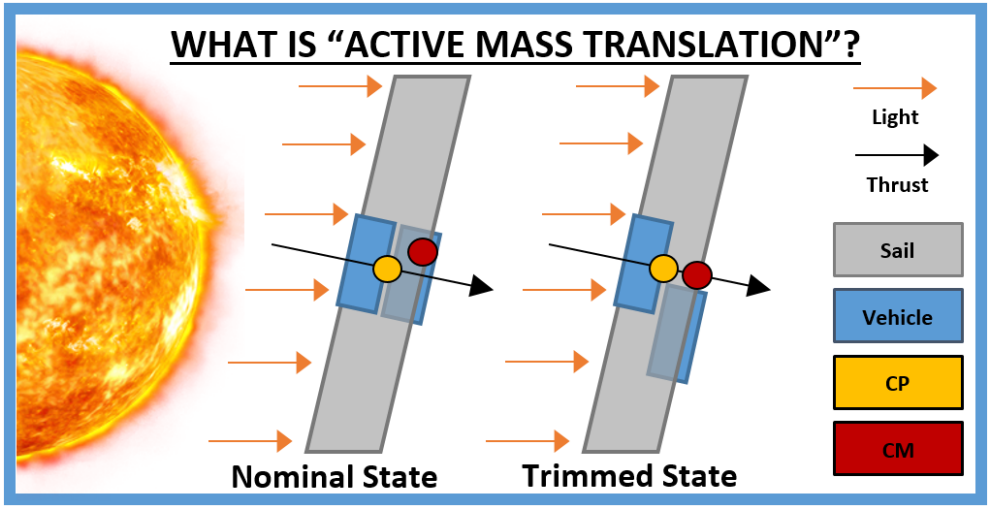

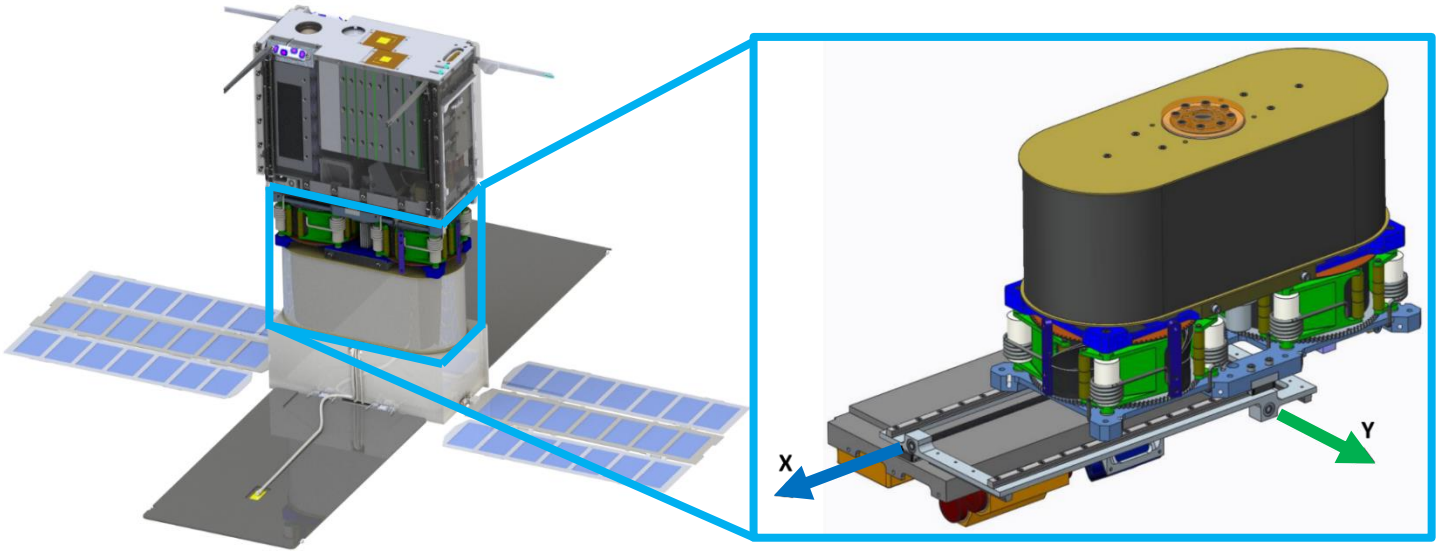

NEA Scout's Reaction Control System

Occupies about 2U of volume on NEA Scout.

Holds 1.25kg of R236fa (refrigerant) propellant.

Two axial jets (Z-axis) for thrust maneuvers.

Four canted jets for attitude control.

Each Jet produces 0.025 N of thrust.

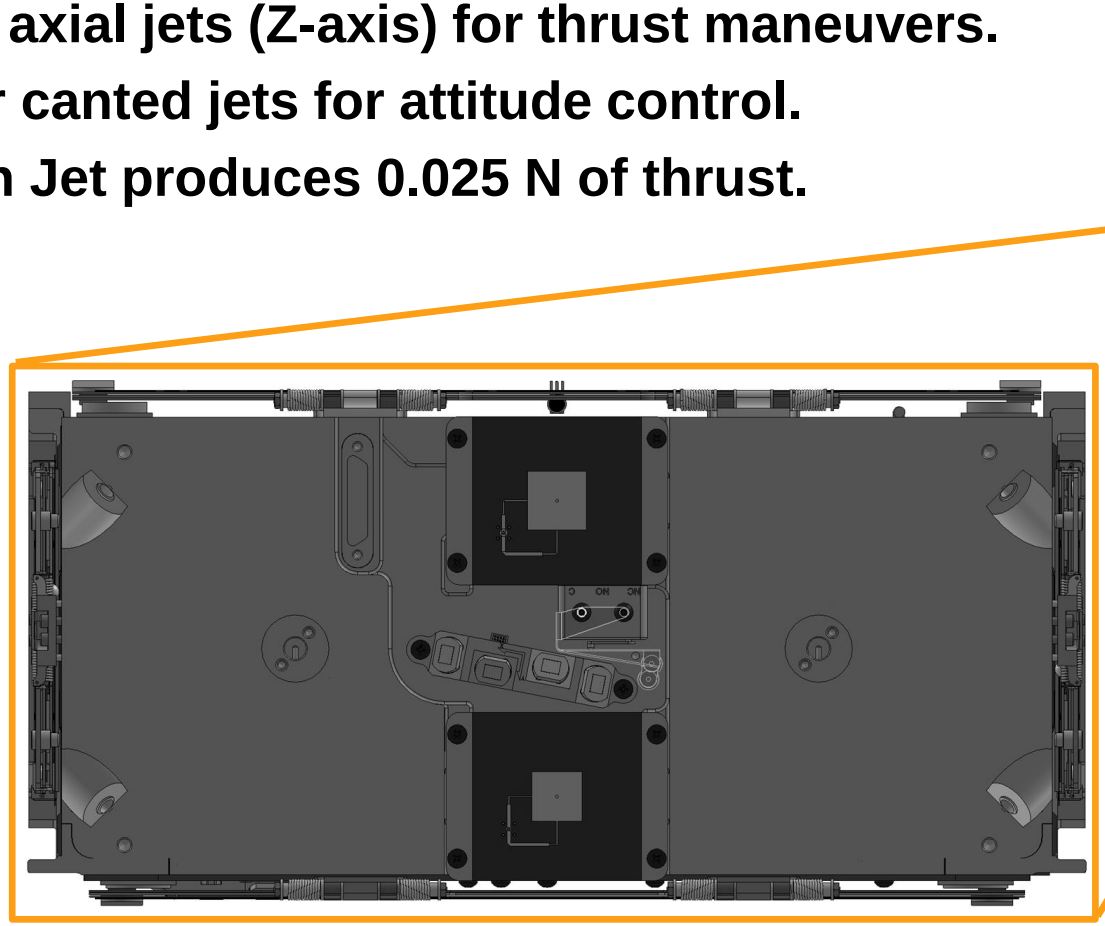

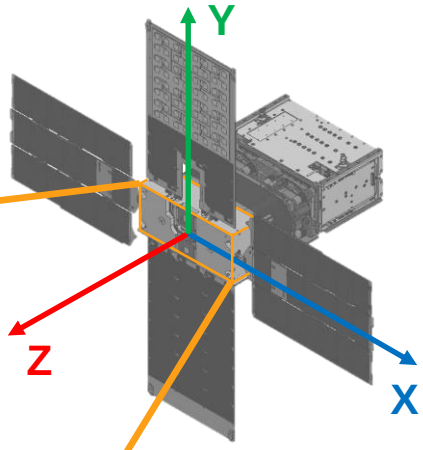

RCS Forces and Jet Selection

Body Axis	Jet 1	Jet 2	Jet 3	Jet 4	Mx (N-mm)	My (N-mm)	Mz (N-mm)
+X	1	0	0	1	**3.534**	0.007	-0.008
-X	0	1	1	0	**-3.159**	0.007	0.008
+Y	1	1	0	0	0.188	**6.792**	0.230
-Y	0	0	1	1	0.188	**-6.778**	-0.230
+Z	0	1	0	1	0.188	0.007	**4.211**
-Z	1	0	1	0	0.188	0.007	**-4.211**

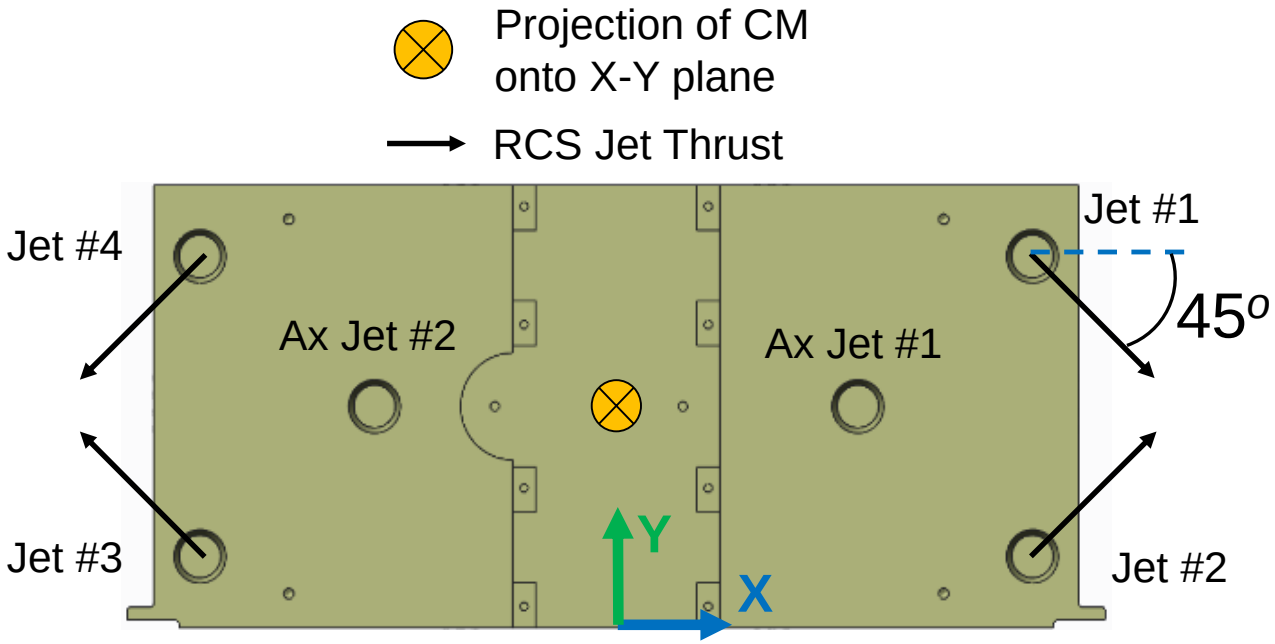

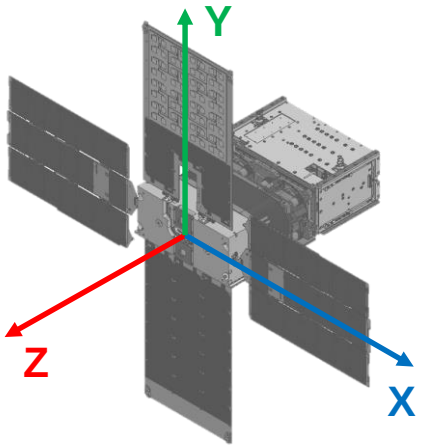

RCS Control Logic – Phase-Plane

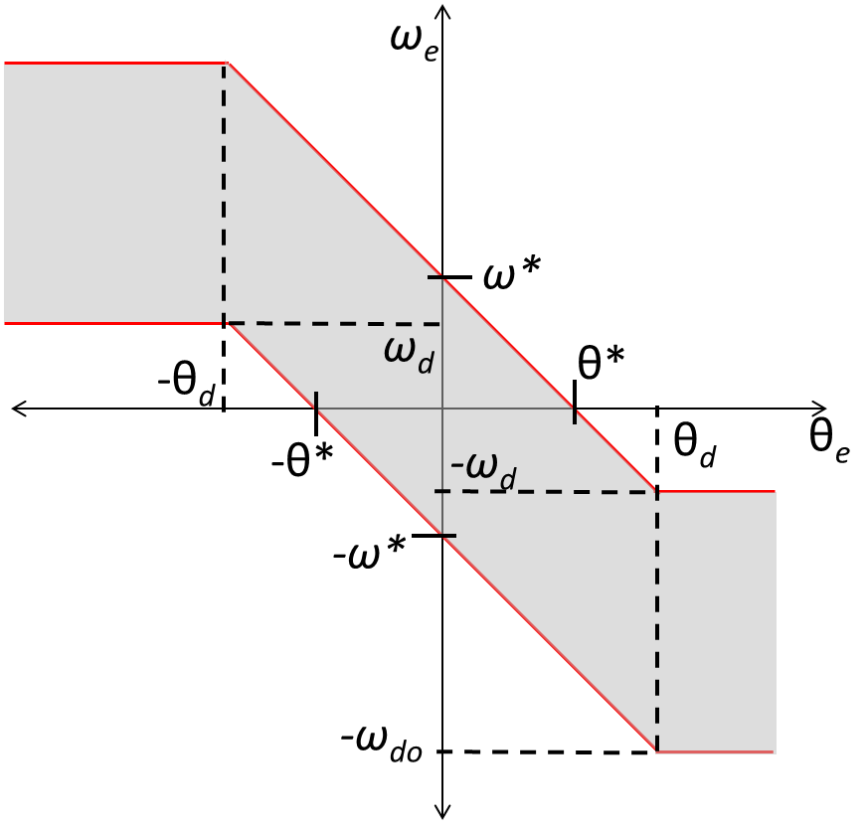

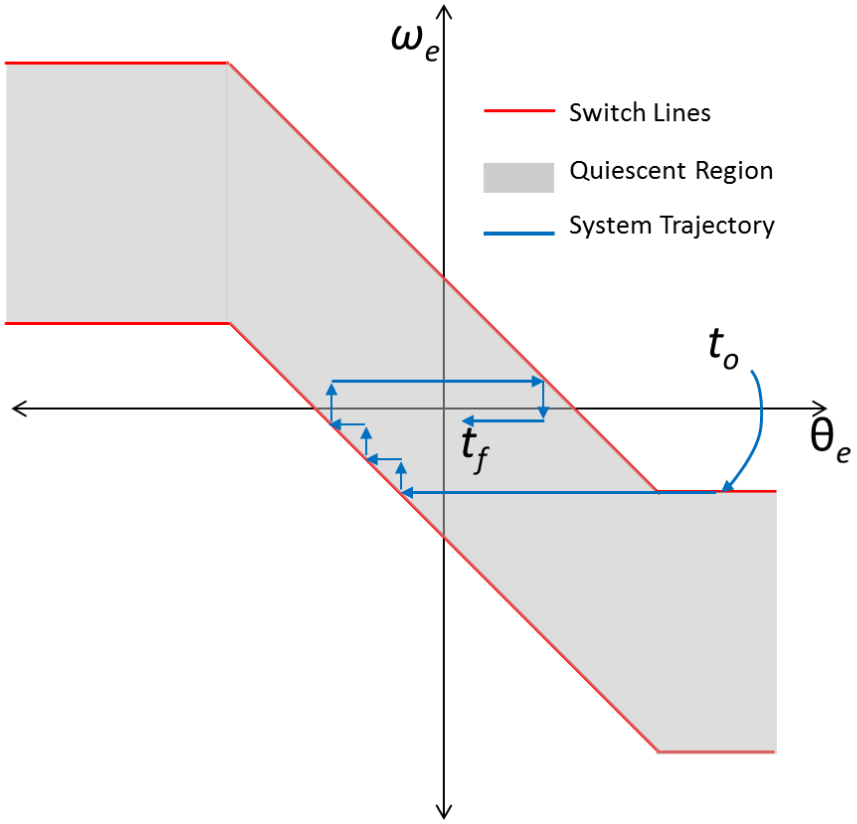

RCS Control Performance - Detumble

Control engaged at *t* = 20s.

Nulls the rates within 1 minute.

Uses 3 grams of propellant.

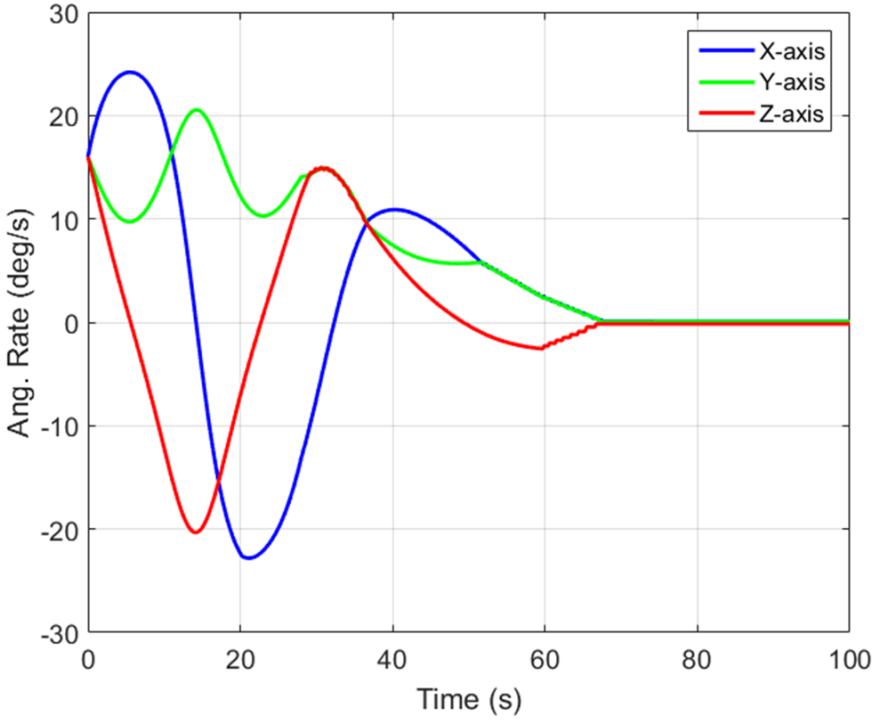

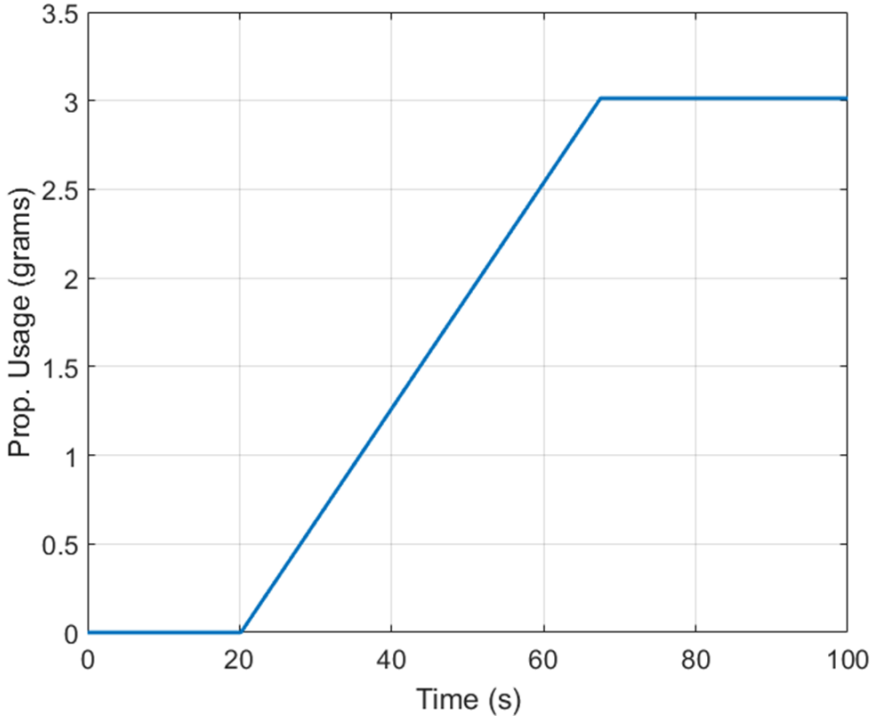

RCS Control Performance – Sun Pointing

After nulling the rates, the RCS' second requirement is to point toward the sun for charging.

This is an autonomous maneuver that uses sun-sensors to locate the sun.

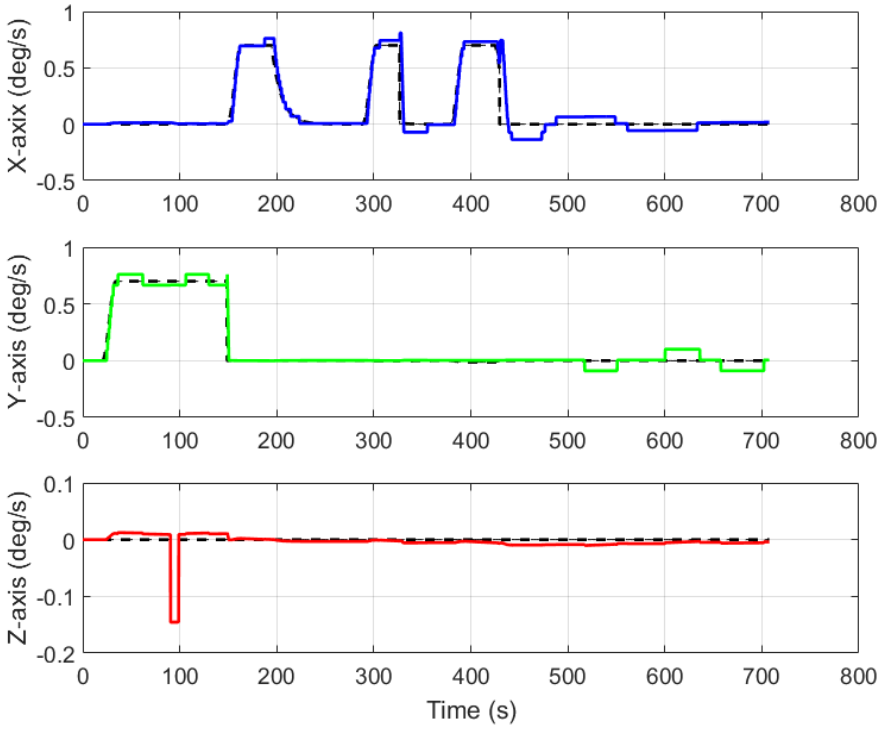

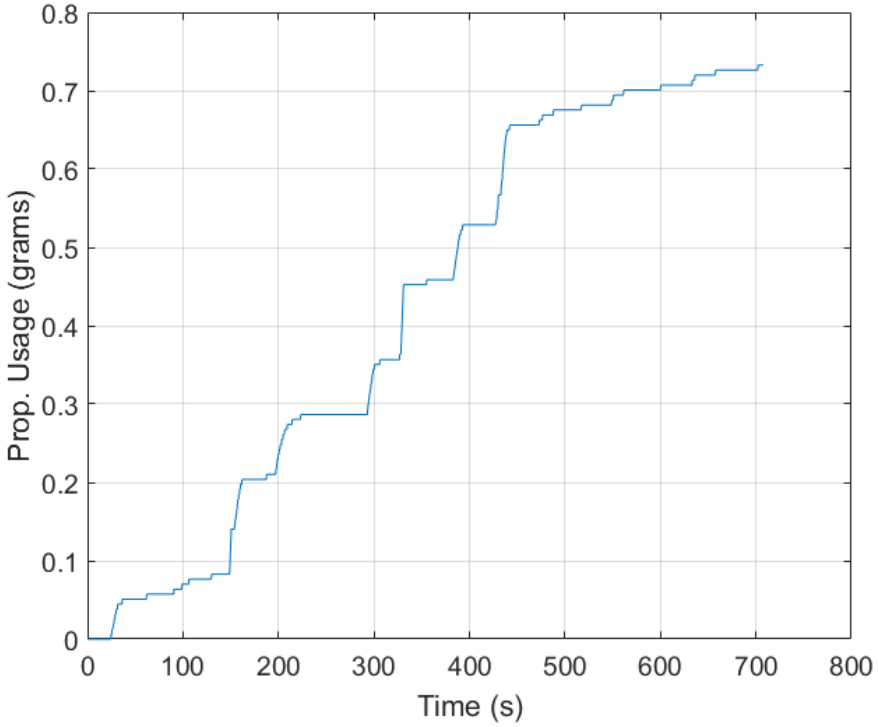

RCS Control Performance - TCM

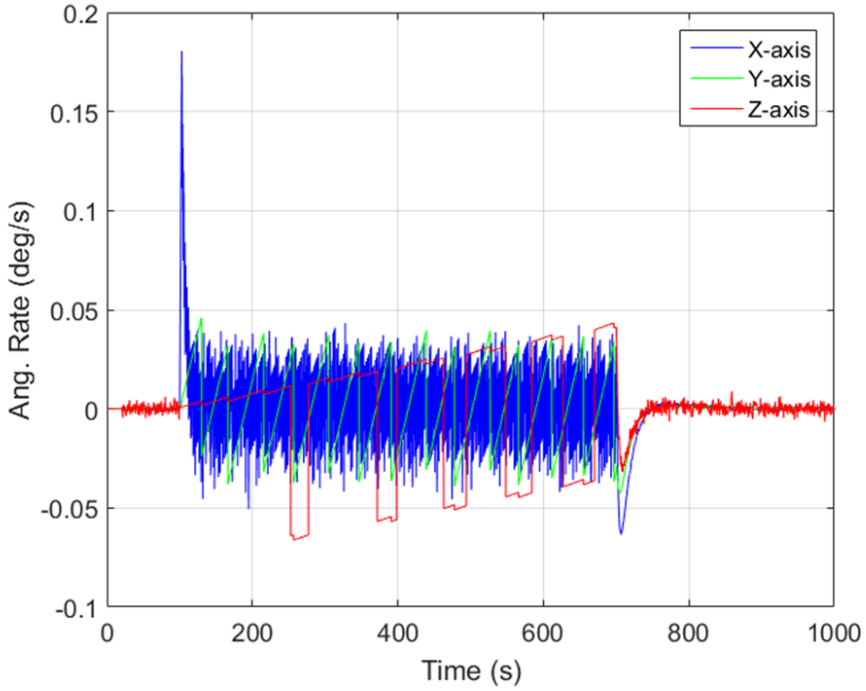

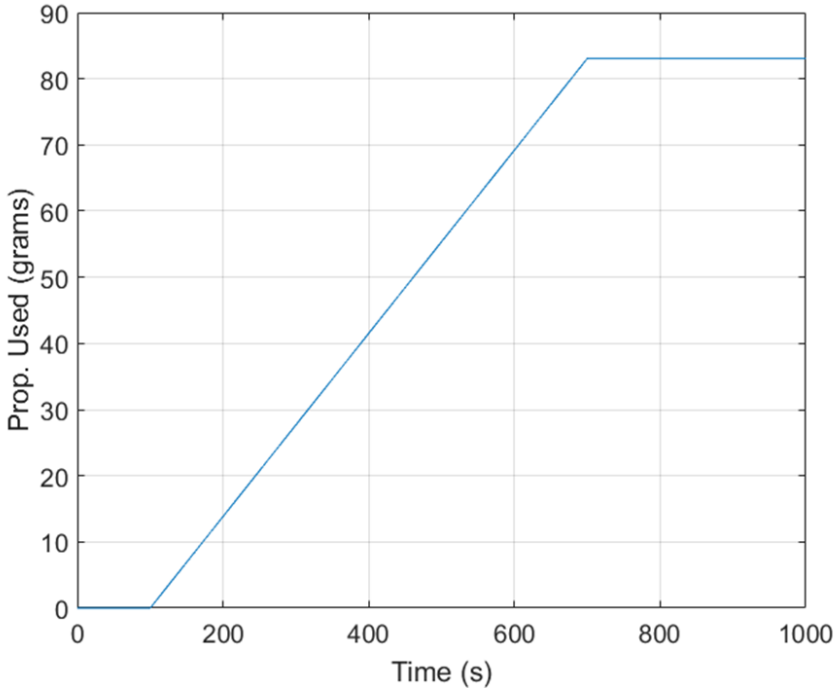

RCS Control Performance – Sail Flex Avoidance

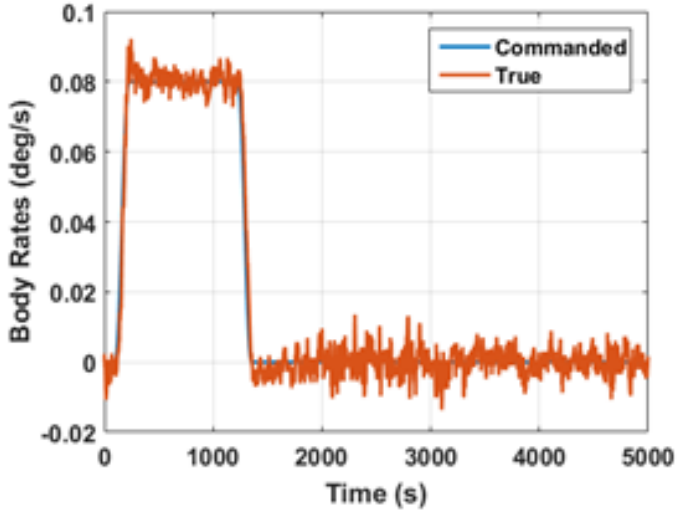

(a)

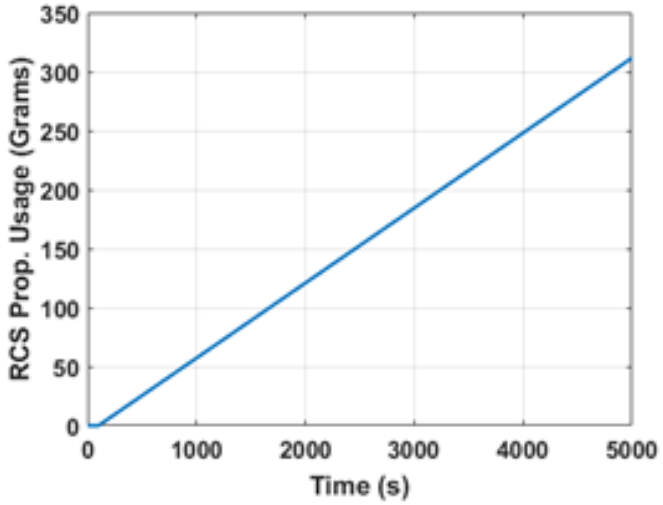

(b)

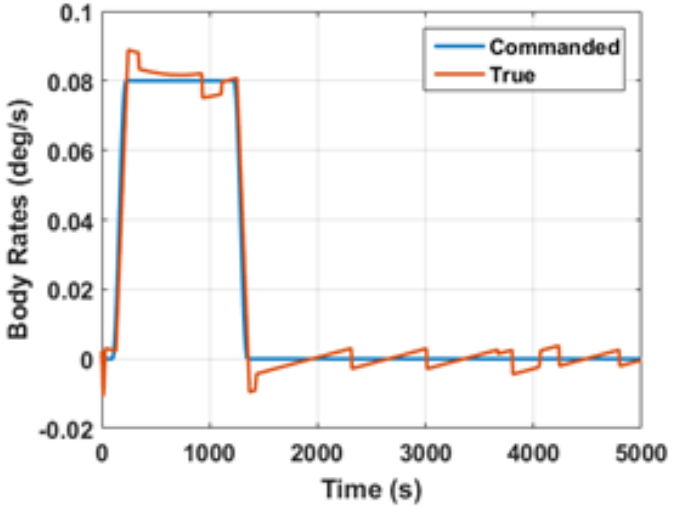

(a)

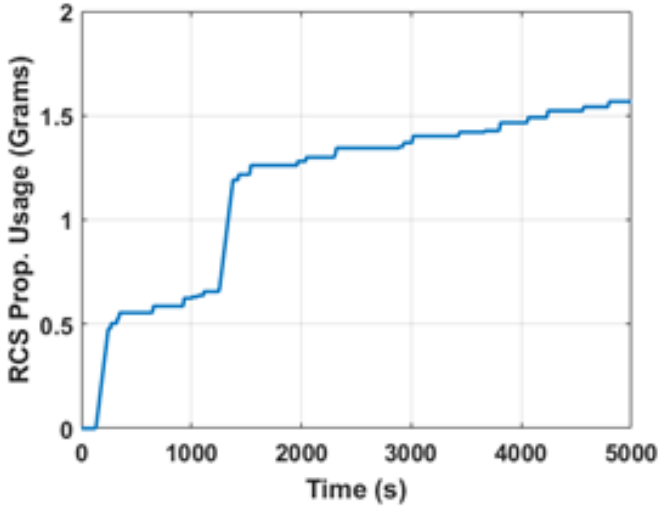

(b)

RCS Control Performance – Mom. Management

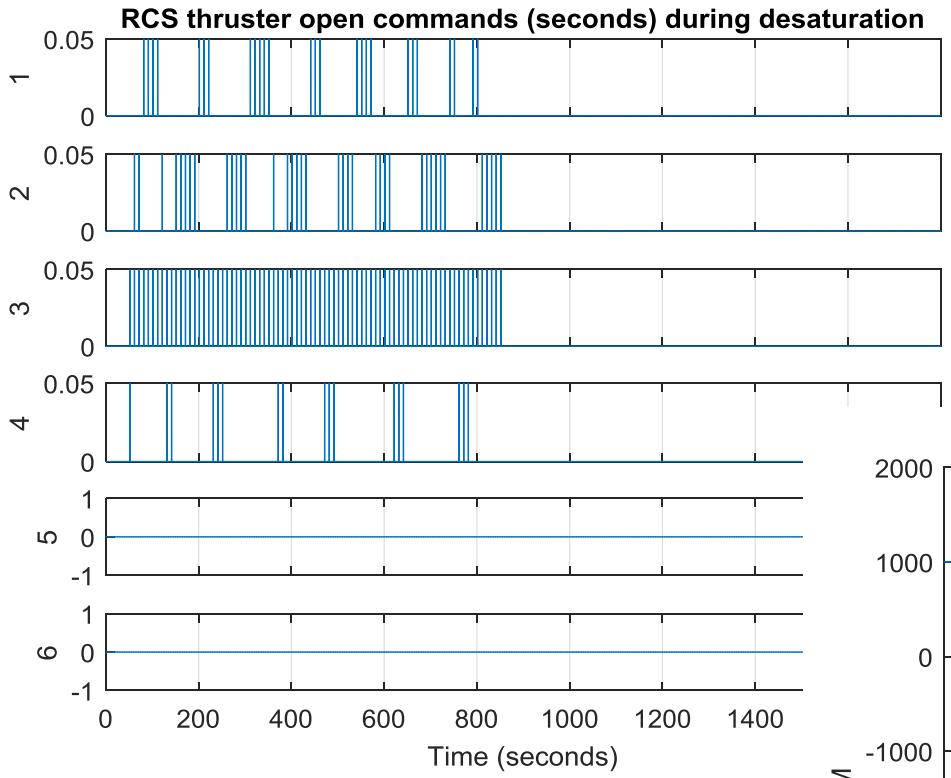

Conclusions

NEA Scout uses a cold gas RCS system for propulsion.

The RCS has four canted jets for attitude control and two axial jets for thrust maneuvers.

The RCS utilizes a simple control logic known as a phase-plane.

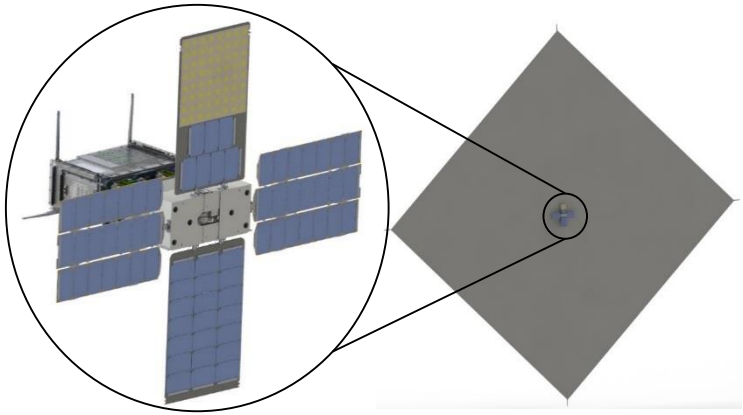

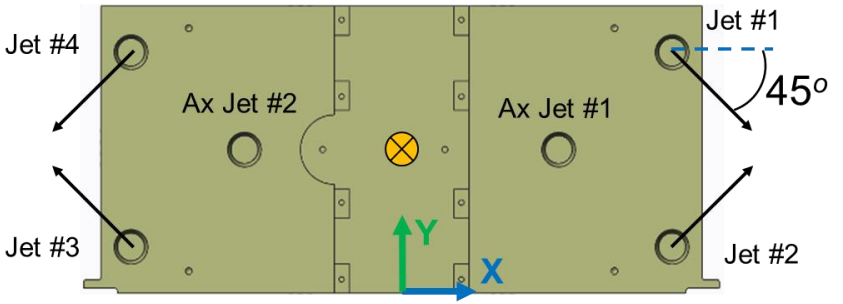

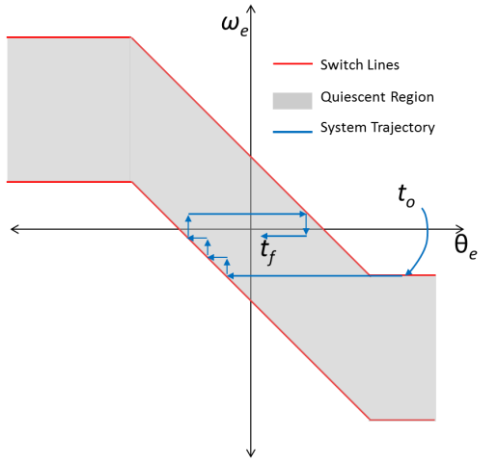

BACKUP

NEA Scout Mechanical Layout (alt. view)

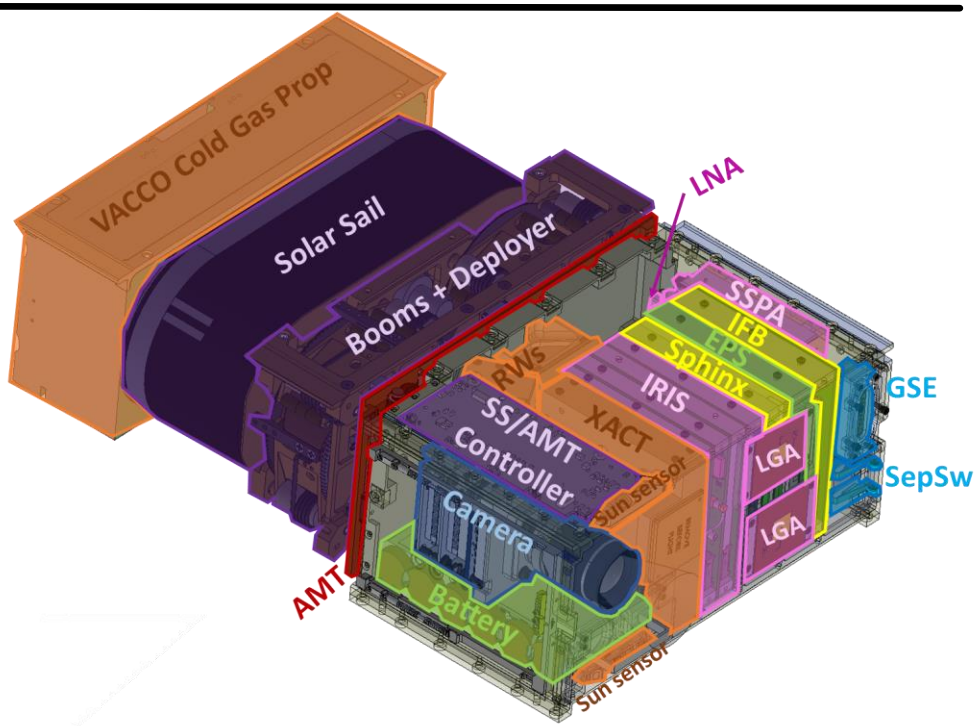

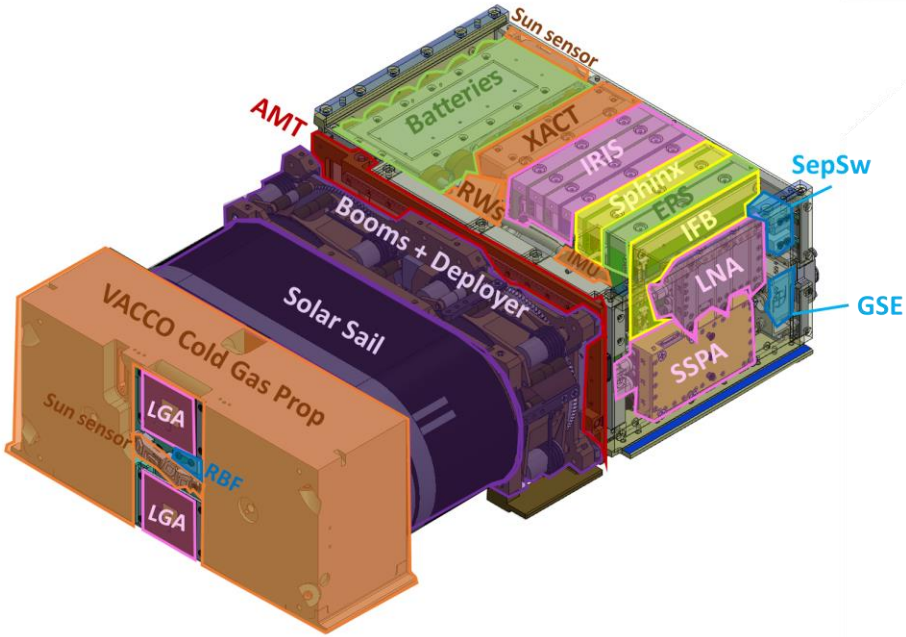

NEA Scout Solar Sail Technology

Light reflects off of the Solar Sail

Provides a small but steady amount of thrust

‘Fuel’ never runs out!

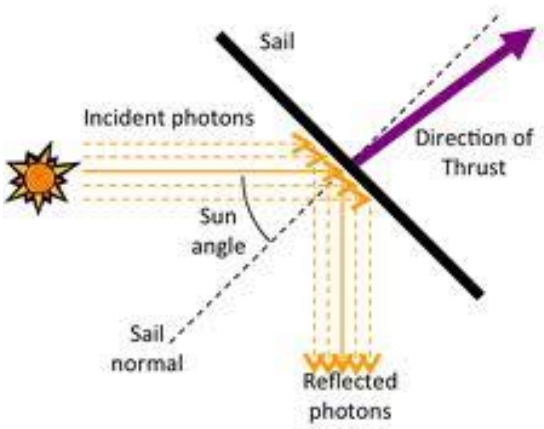

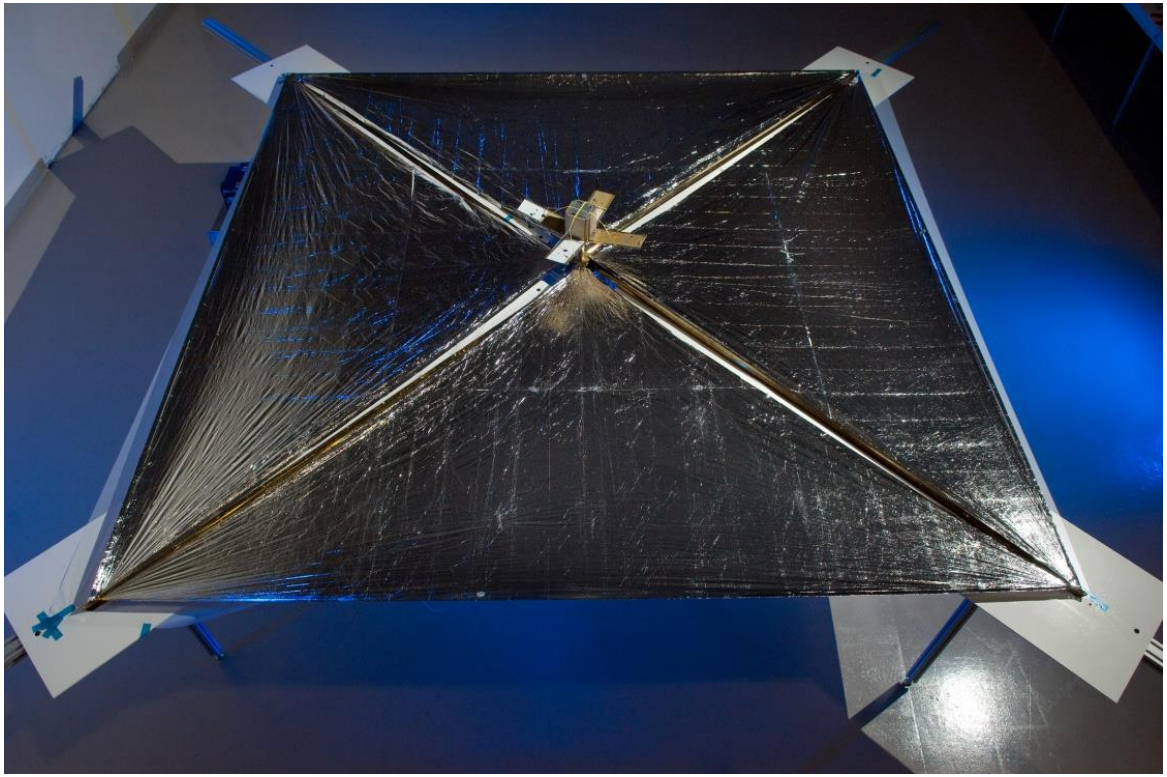

1st Full Scale Solar Sail Ground Deployment

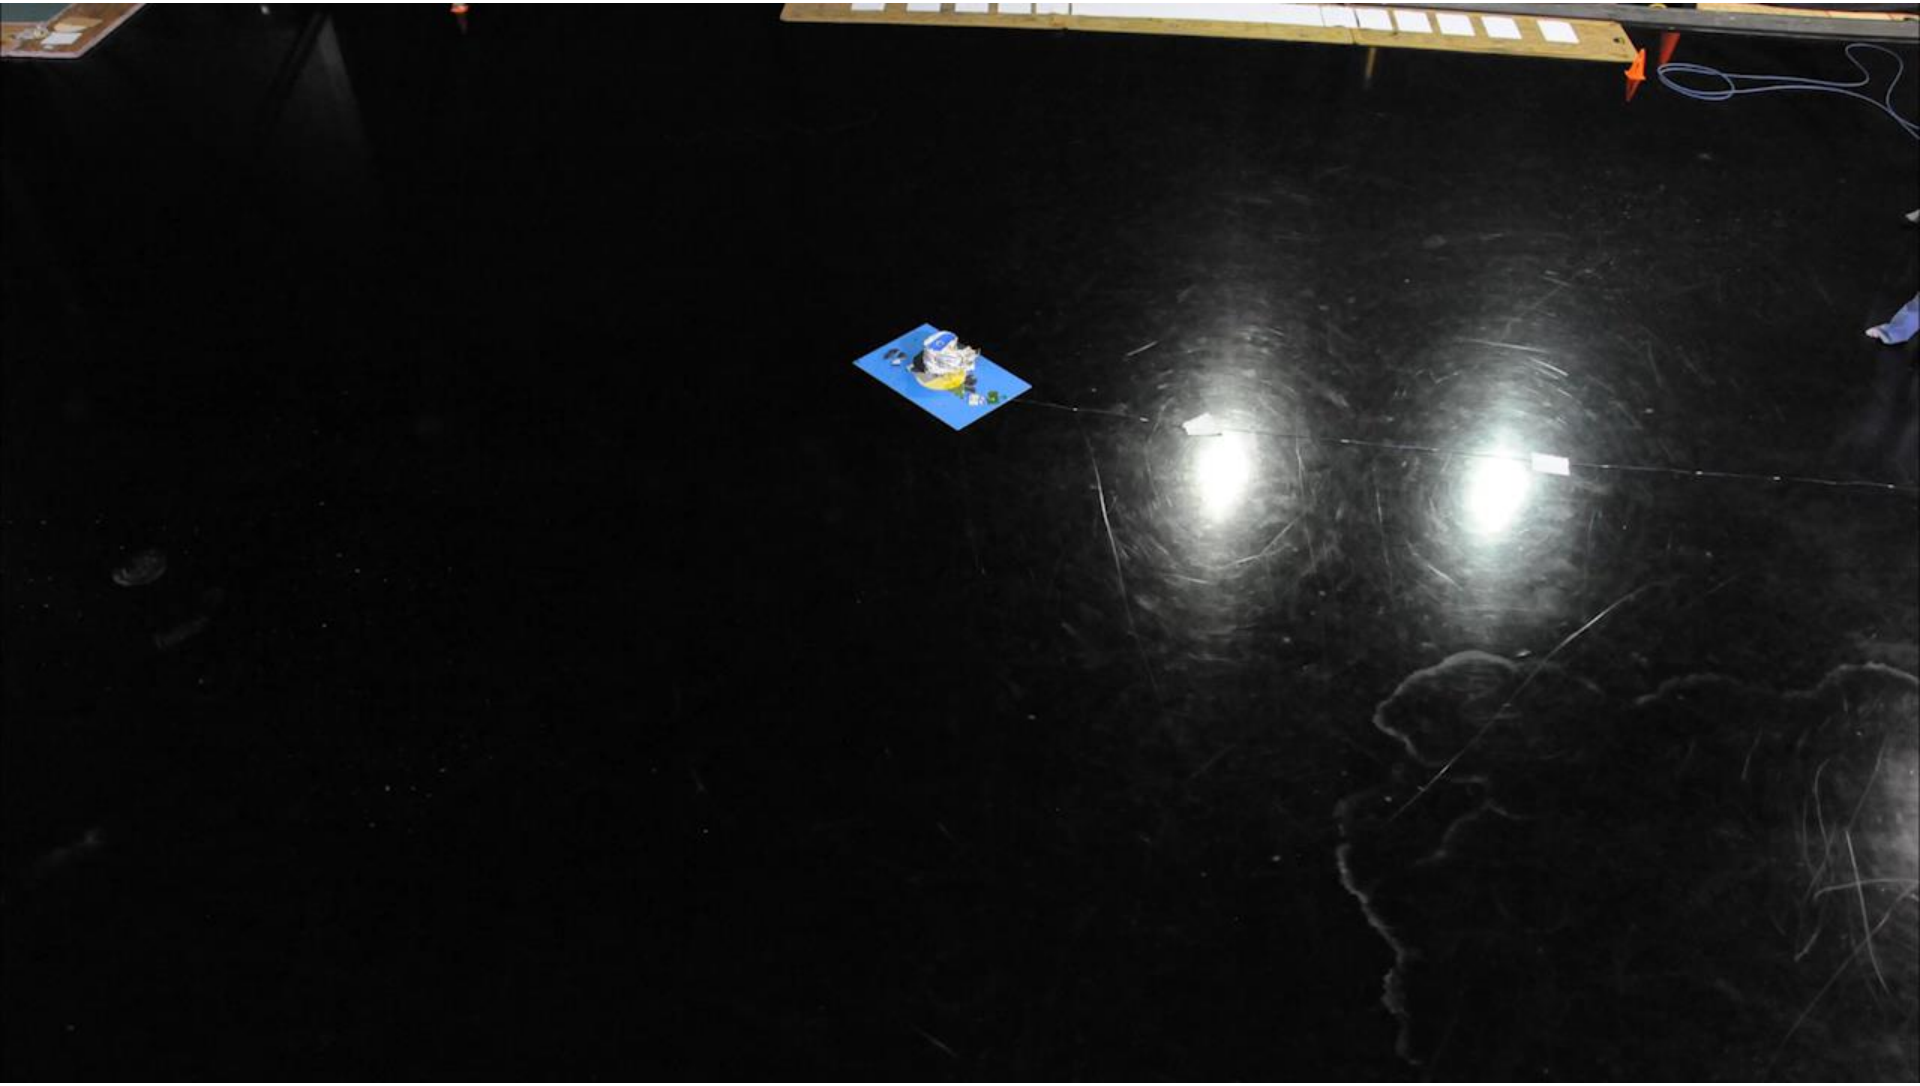

Simulated NEA Scout Mission CONOPS

Flight System Configuration – Stowed

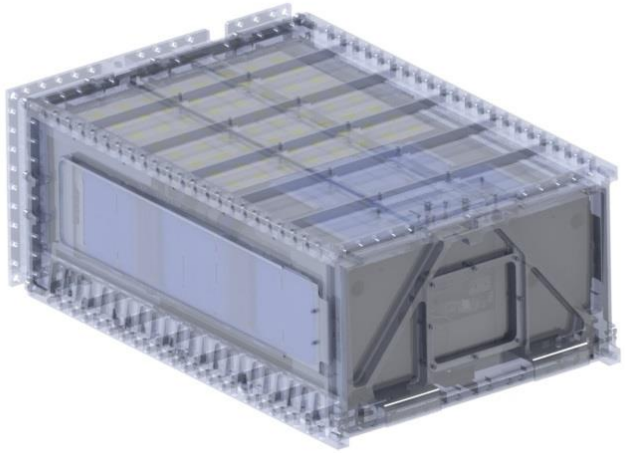

NEAS Inside PSC
6U Dispenser

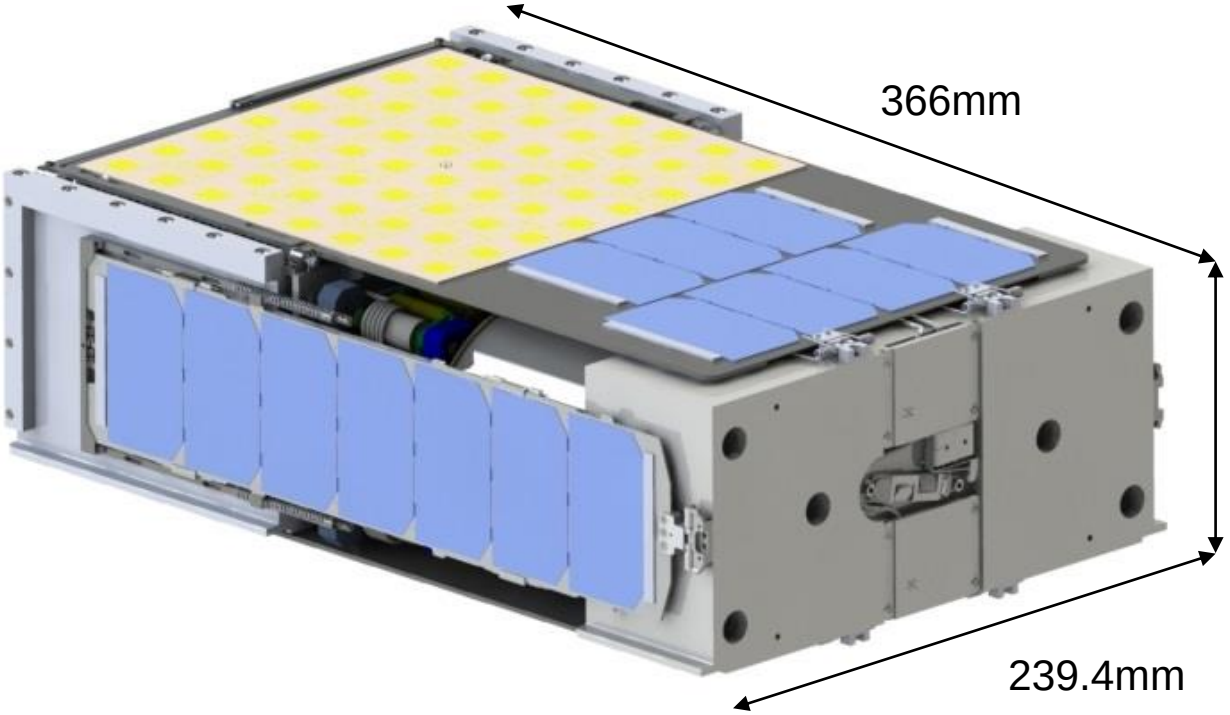

SLS Interface

- Manifested on SLS EM-1; mounted in MSA and housed within Planetary Systems Corp. Cannisterized Satellite Dispenser (CSD)
- Project interfaces with Secondary Payload Office (SLS) and Launch Services Program (Dispenser)
- Handover to GSDO installed in dispenser and powered-off
- After Orion separation, ICPS performs disposal maneuver
- Post-disposal, secondary payload sequencer activated
- Each payload dispensed at designated times via signal from sequencer
- Separation switches on payload activated upon deployment, powering on spacecraft

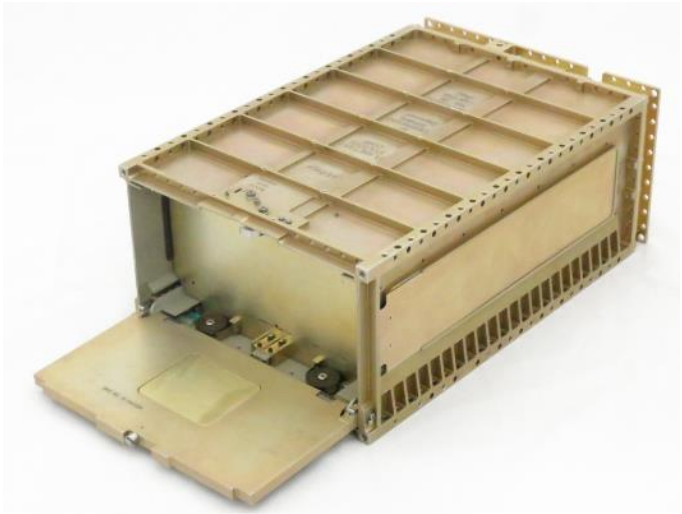

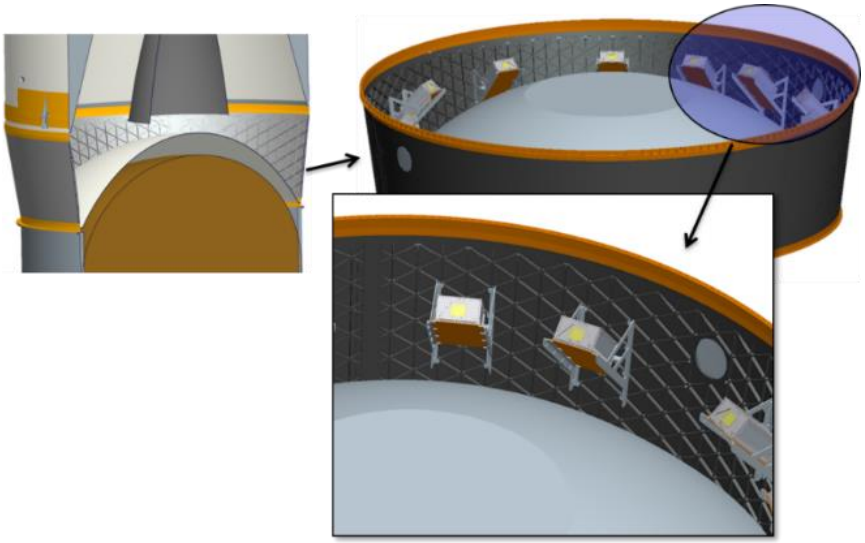

Thrust Model: Underlying Physics

- **Flat Plate optical model published in Wright and cited by McInnes**
- **Shows tangential and normal components**
- **Tangential component important to torque**

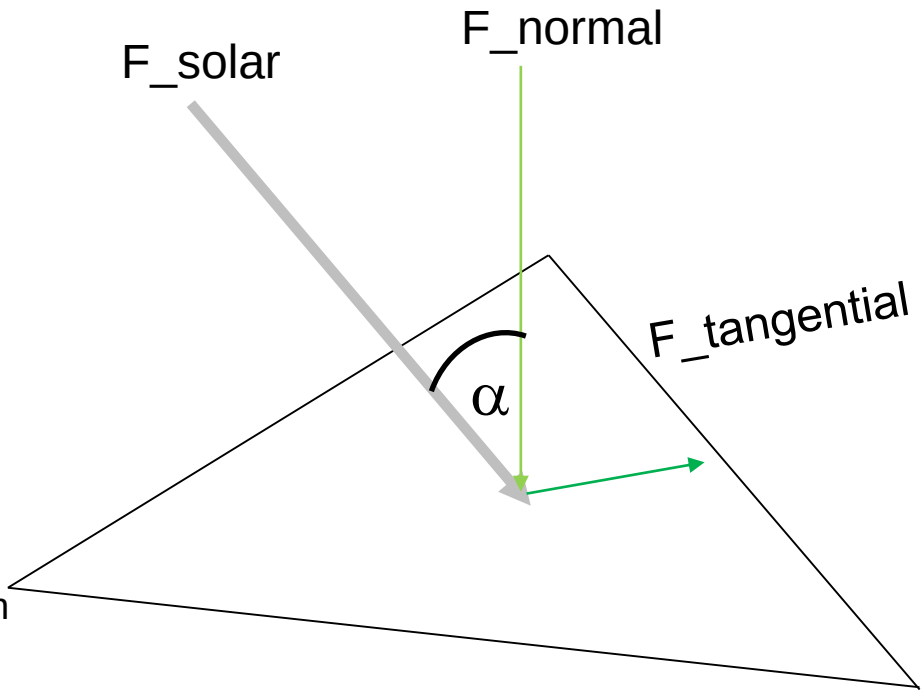

P = solar pressure

A = area

$\tilde{r}$ = total reflectivity

s = fraction of reflection that is specular

α = sun incidence angle

Bf, Bb = front and back side non-Lambertian coefficients

ef, eb = front and back side emissivities

$$f_n = PA\left\{(1+\tilde{r}s)\cos^2\alpha + B_f(1-s)\tilde{r}\cos\alpha + (1-\tilde{r})\frac{\varepsilon_f B_f - \varepsilon_b B_b}{\varepsilon_f + \varepsilon_b}\cos\alpha\right\}$$

$$f_t = PA(1-\tilde{r}s)\cos\alpha\sin\alpha\, t$$

Flight System Overview

NEA Imager

Star Tracker/ Drive Control Electronics* (BCT)



LGAs

Iris 2.1 Transponder and Electronics



Sun Sensors* (BCT)

6x 18650 Lithium Batteries (Panasonic)

IMU (Sensonor)



4X RWA 15 mNms (BCT)



Active Mass Translator

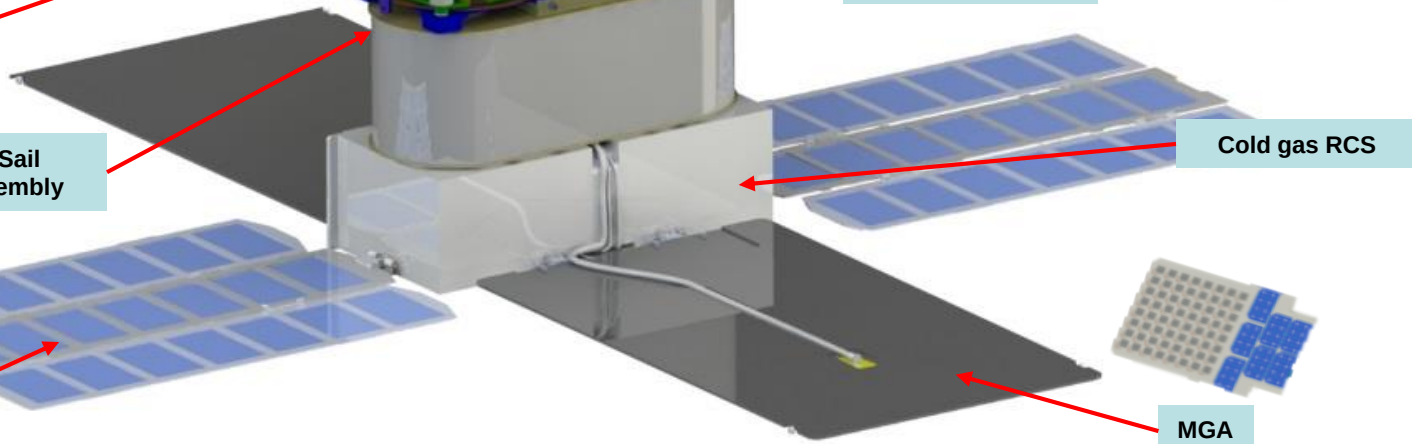

Solar Sail Subassembly

Cold gas RCS



HAWK Solar Array (MMA)

MGA

Mission ConOps

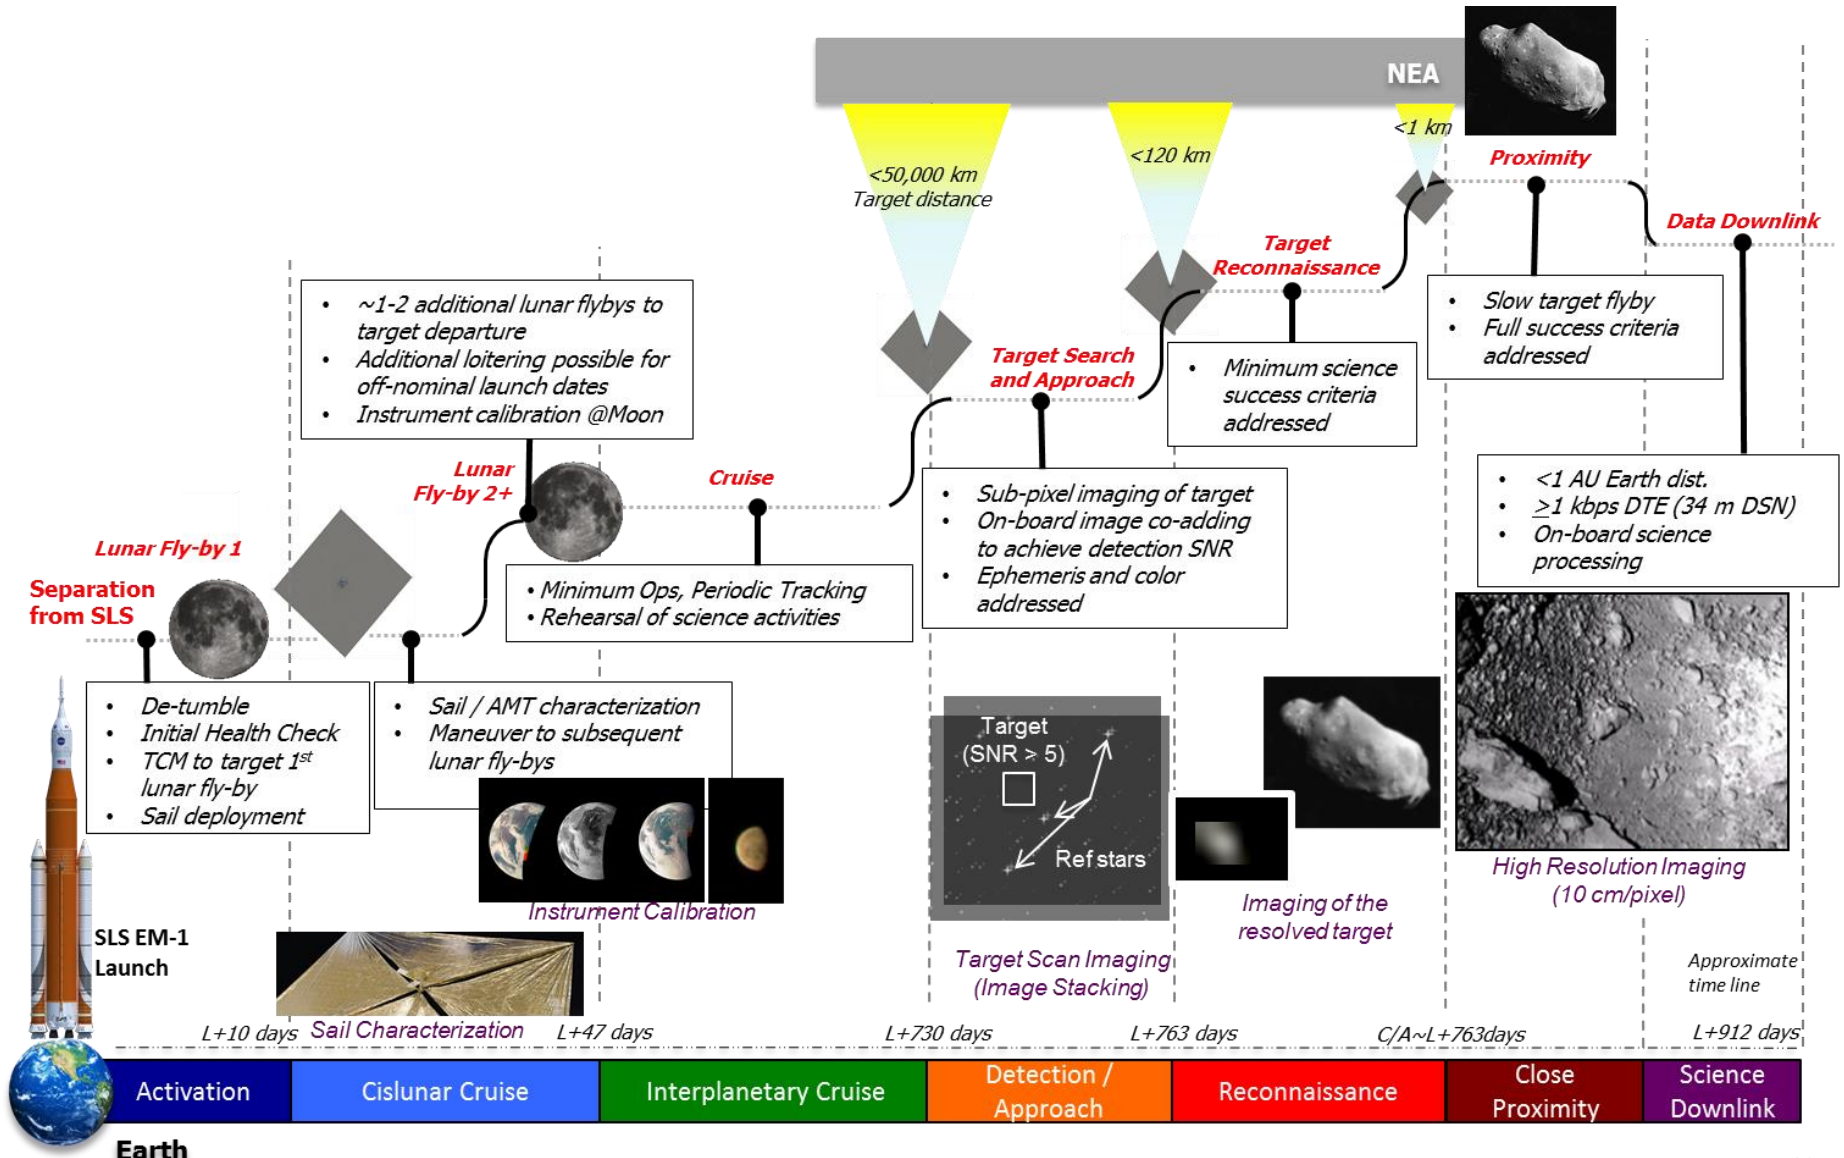

*time not to scale

Other Reaction-Jet Control System (RCS)

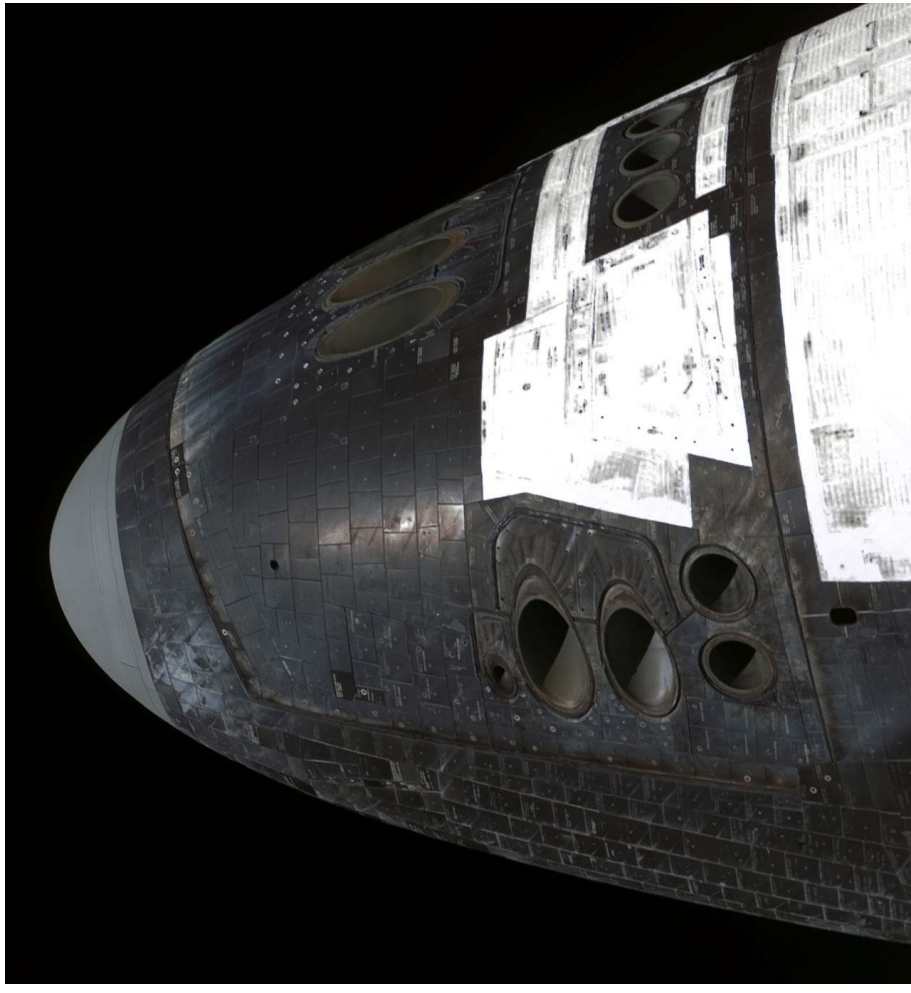

Solar Sail Thrust Model and Analysis Flowchart

Integrated model

- Detailed model of booms
- One-element model of membrane
- Structural analysis with thermal deformations

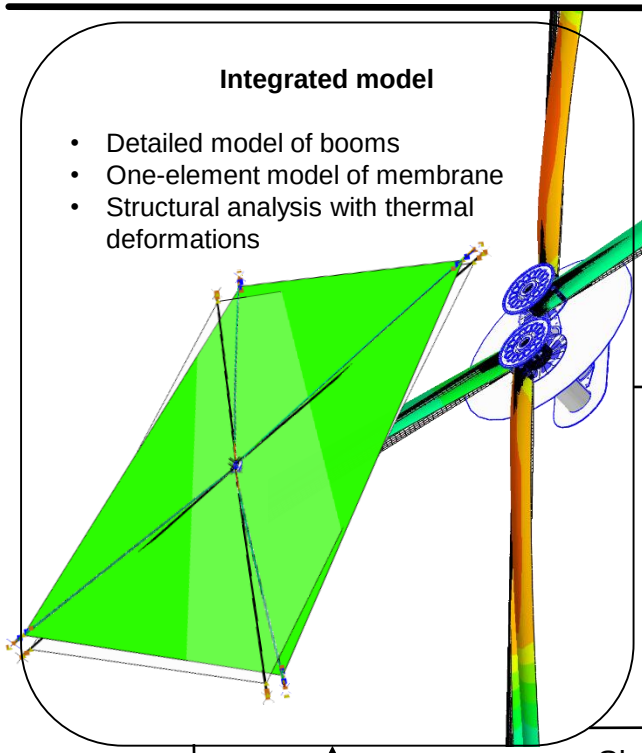

Corner displacements

Membrane model

- Detailed (~5 cm) model of membrane
- No model of booms

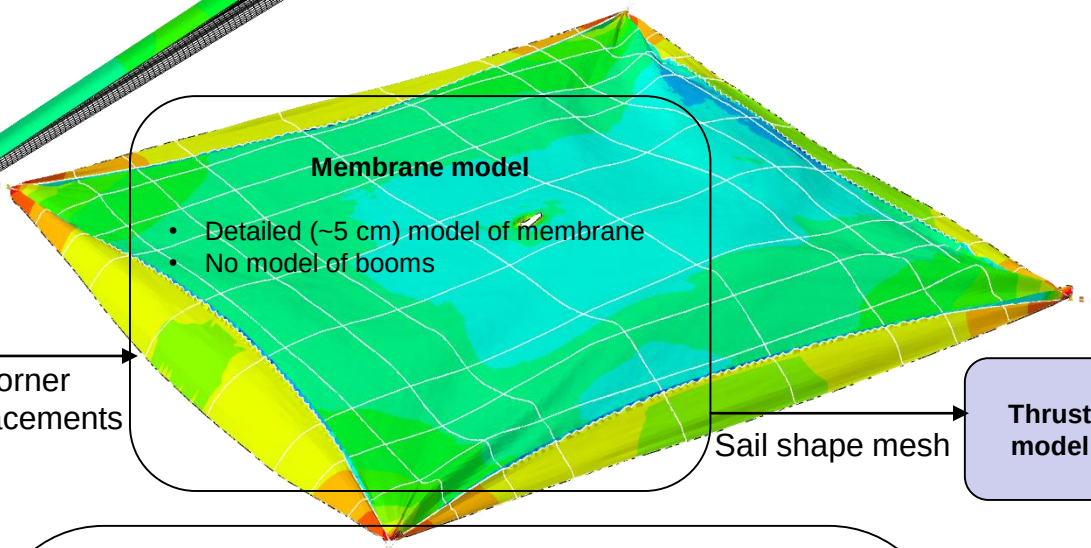

Sail shape mesh

Thrust model

Shape solution

Dynamic model

- Fixed-bus model
- Stiffness matrix includes the effects of sail tensioning and thermal loading
- Reduced dynamic model is integrated with the spacecraft bus for attitude control studies

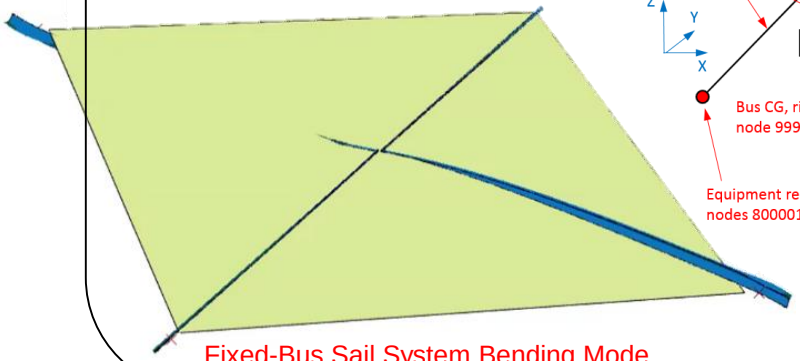

Fixed-Bus Sail System Bending Mode

Reduced/simplified dynamic model

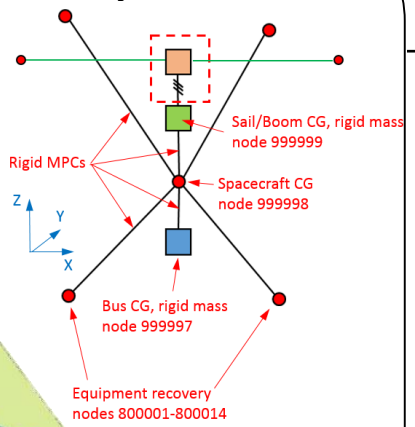

Attitude control model

Thermal model

- Radiative and conductive heat transfer

Summary & Project Status

- **Summary**
  - Numerous challenges exist in implementing a Solar Sail mission, particularly within a CubeSat form factor
  - Extensive design, analysis, and testing has been performed to-date to address these challenges
  - Difficulty in validating analytical models and performing ground (1G) demonstrations given gossamer nature of Solar Sails
  - NEA Scout flight on SLS EM-1 flight opportunity (2018) will provide a giant leap forward in clarifying our understanding of Solar Sail modeling and performance
- **Project Status**
  - On track for August Design Review with significant flight procurements to follow
  - Flight System integration starts June 2017
  - Manifested on SLS EM-1 for 2018 deep space flight opportunity
  - NEA flyby anticipated in 2021

Solar Sail Subsystem Overview

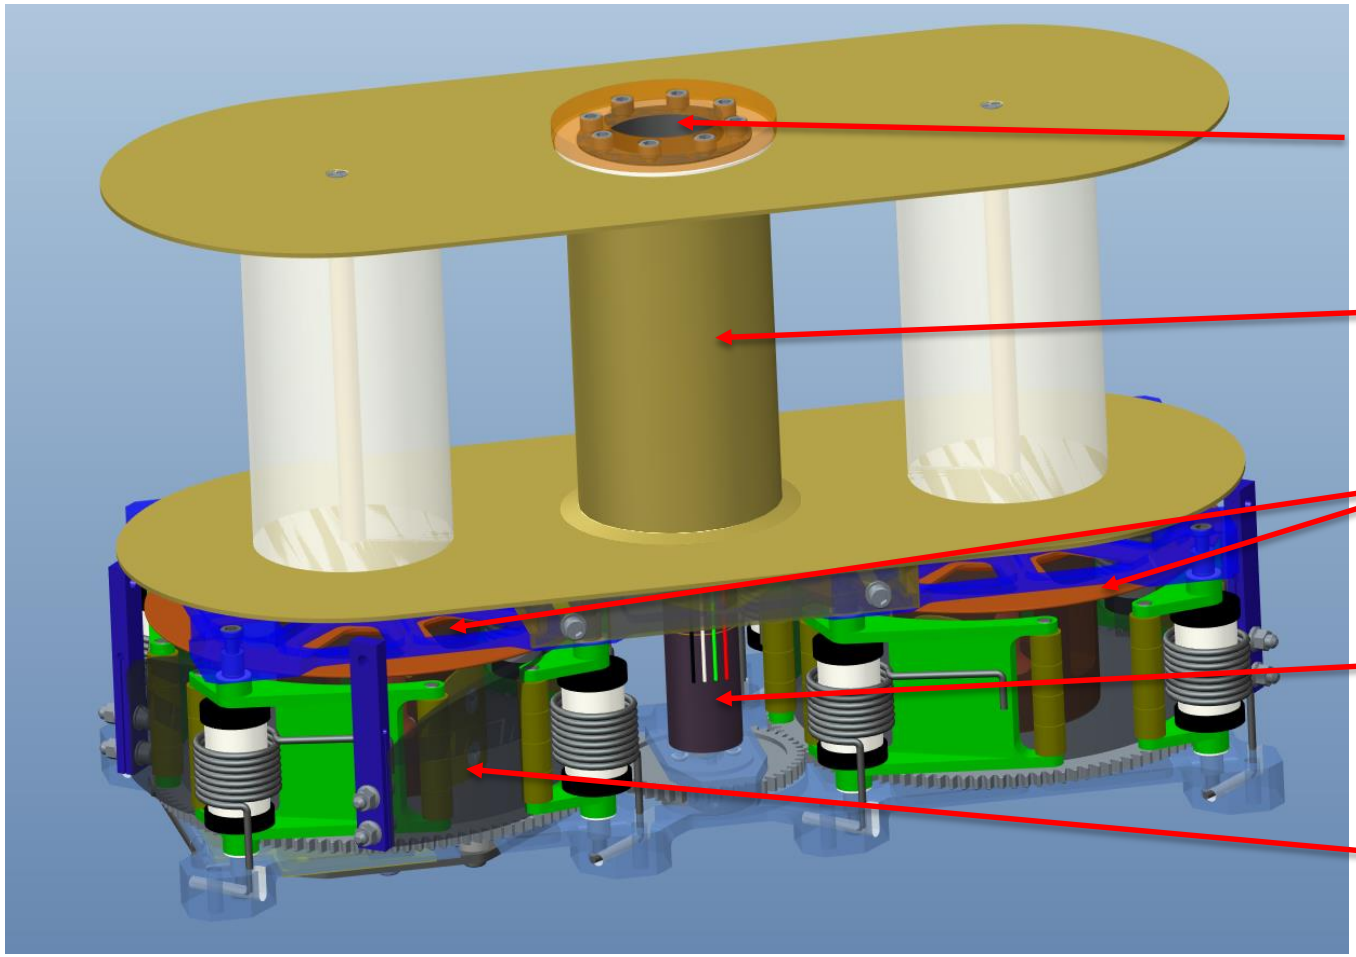

Solar Sail Subsystem Overview

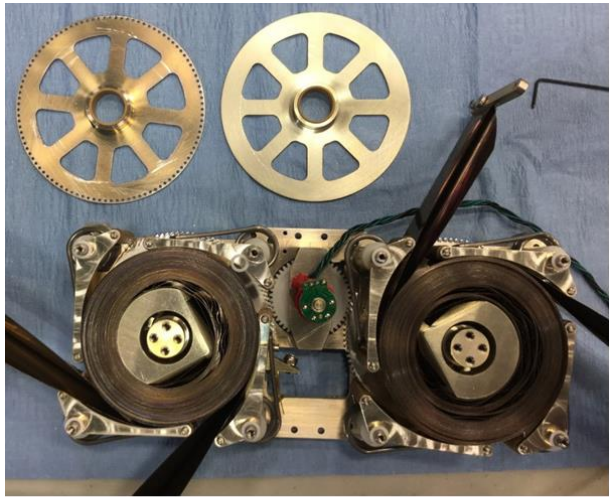

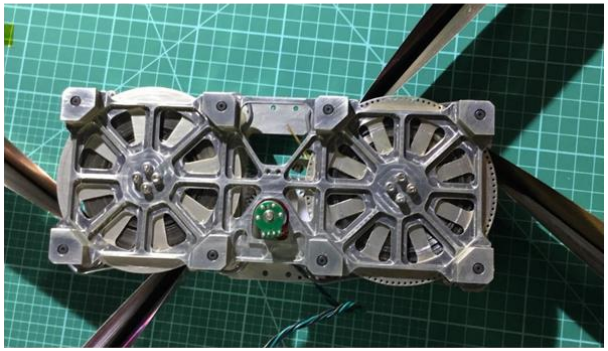

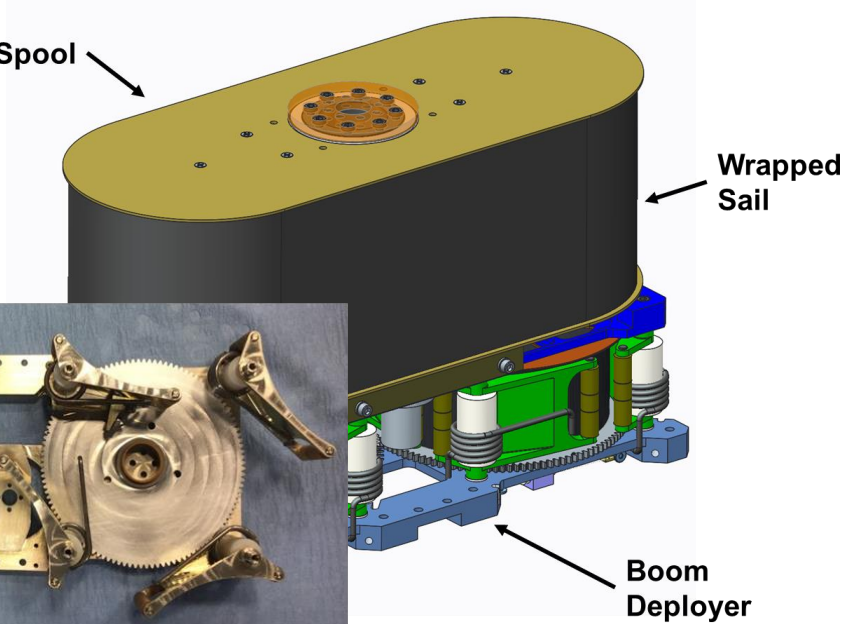

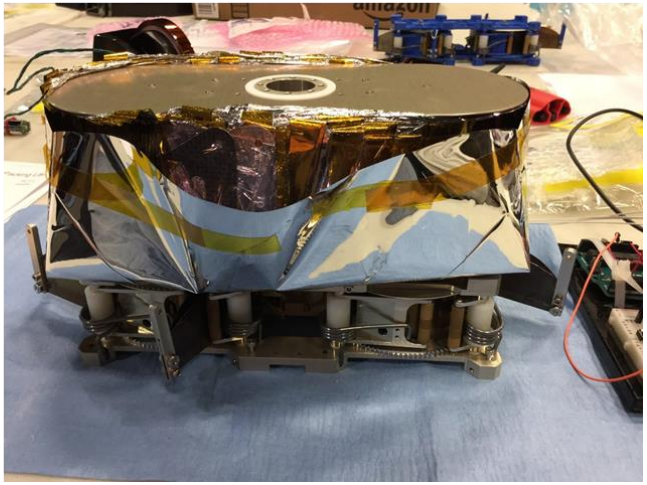

Solar Sail Booms (@NeXolve)

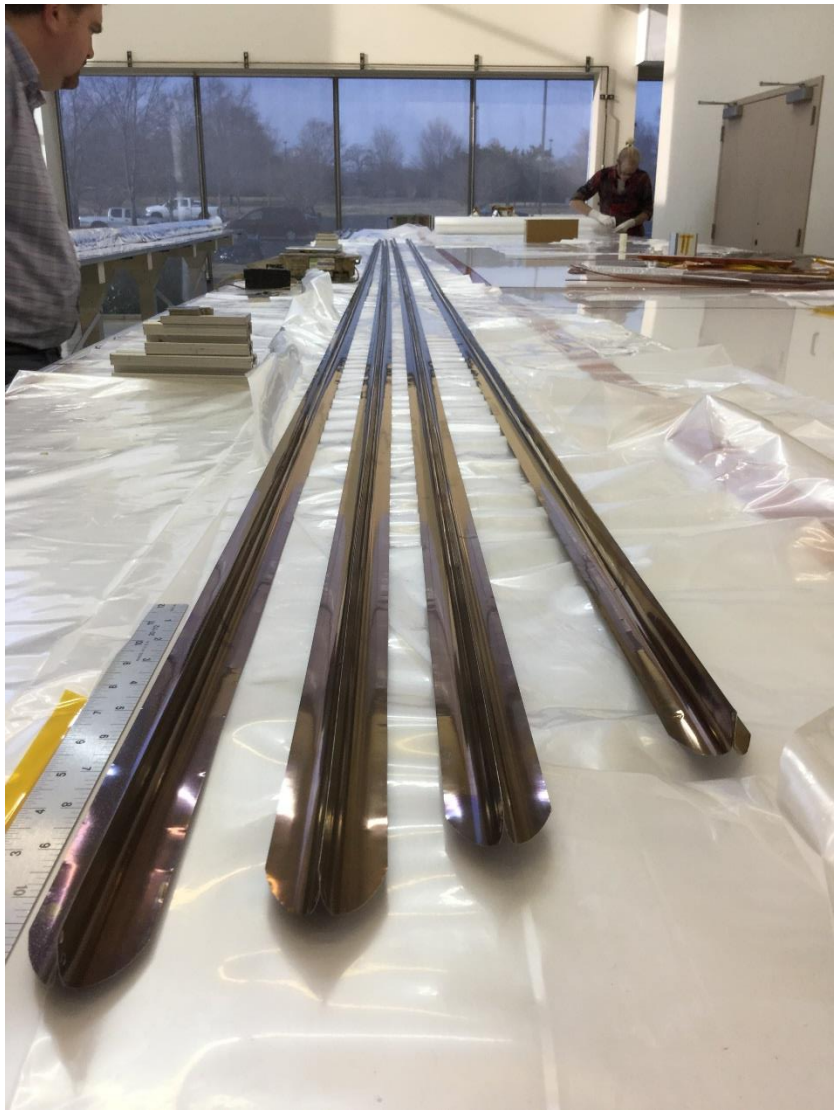

Disturbance Torques: Active Mass Translator (AMT)

Nominal State

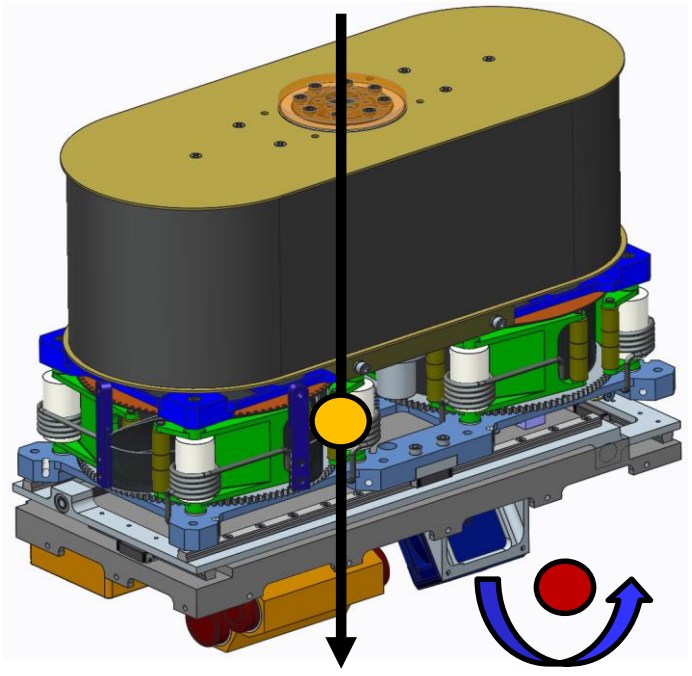

AMT

Trimmed State

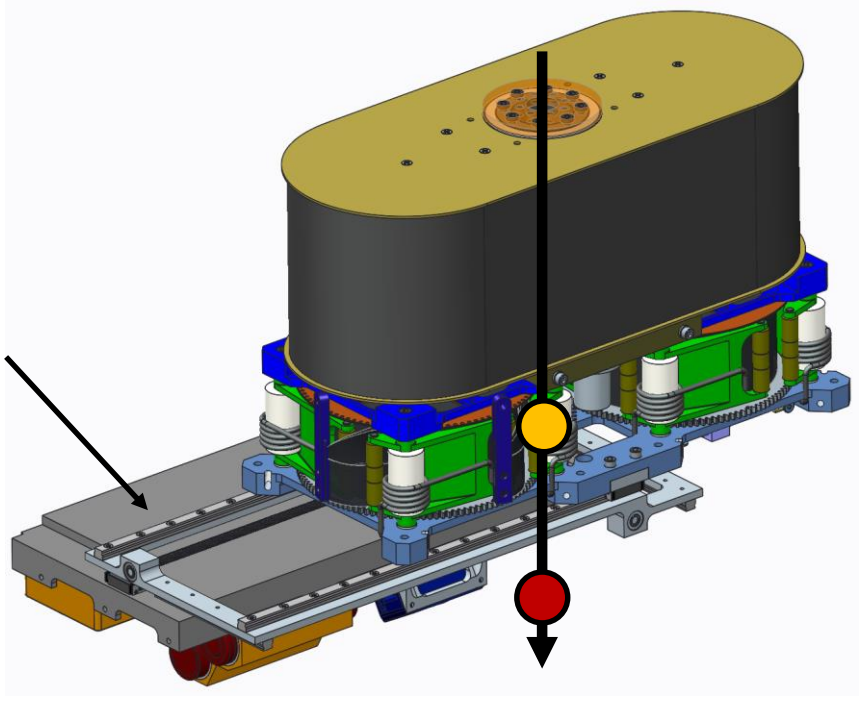

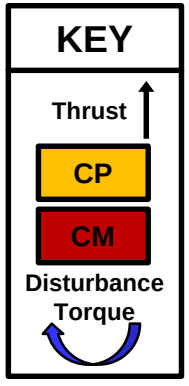

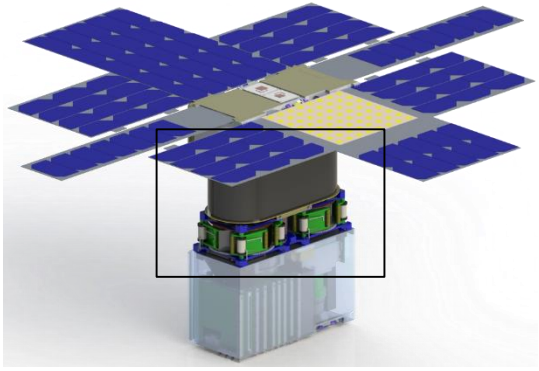

Transient Solar Sail Deployment – Shape Phases

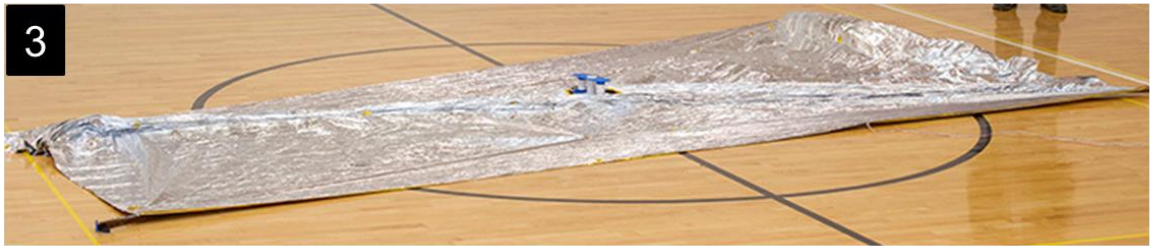

Single sail membrane drives initial ‘bow tie’ effect: Booms are do not maintain 90deg relative orientation (less predictable induced disturbance force) and direct sunlight on booms drive significant thermal deflections

NEA Scout Science

Close Proximity Science
High-resolution imaging,
10 /px GSD over >30% surface
SKGs: Local morphology
Regolith properties

JPL IntelliCam (Updated OCO-3 Context Camera)

NEA Reconnaissance
<100 km distance at encounter
50 cm/px resolution over 80% surface
SKGs: volume, global shape, spin properties, local environment

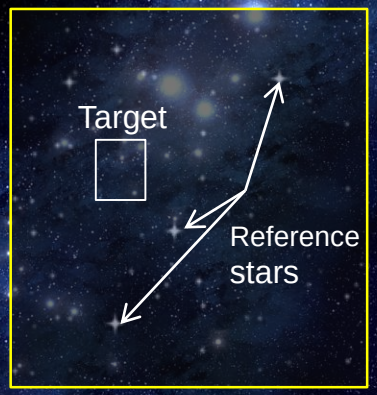

Target Detection and Approach:
50K km, Light source observation
SKGs: Ephemeris determination and composition assessment (color)